



Imaginative installations

PRICE LIST VI / 2026

- ◆ CHIMNEY SYSTEMS
- ◆ VENTILATION SYSTEMS
- ◆ CHIMNEY CAPS
- ◆ THERMAL INSULATION SYSTEMS
- ◆ LAUNDRY CHUTES



PRICE LIST - VI EDITION 2026


© PRODMAX SP. Z O.O. 05-806 Sokołów, ul. Sokołowska 38, Polska



Prodmax Sp z o.o. has been operating in the market for over 30 years and is currently one of the largest Polish manufacturers of chimney and ventilation systems. We specialize in the production of exhaust systems made of acid-resistant and heat-resistant sheets, as well as a wide range of ventilation and heat recovery systems. We are also a leading manufacturer of aluminum Flex ducts.

Thanks to our extensive experience, our modern production facility in Żuromin produces a wide range of products, including custom-made components, according to customer specifications.

The purchase of a production line has enabled the production of high-quality foamed polyethylene insulation and protection. Our professional machinery, which includes the latest generation of fiber lasers from EAGLE and TRUMPF, press brakes, rolling mills, and welding robots, allows us to meet the expectations of all our customers. Our machinery has also been expanded with the world's fastest laser cutter for tubes and profiles, the TruLaserTube 5000 Fiber from TRUMPF. The quality of our products is constantly improved, as evidenced by the purchase of a new technological line for laser welding of pipes from WEIL.

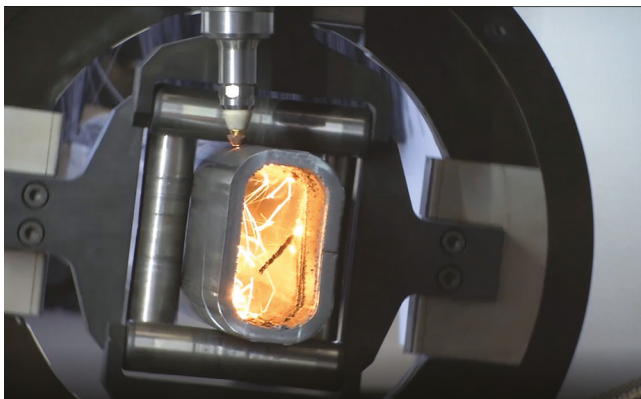

We are constantly expanding our product range with innovative chimney and ventilation systems for single-family and industrial buildings.

We listen to our customers and develop new products that meet their expectations.

We operate based on the rigorous requirements of European standards, including those related to environmental protection.



CHIMNEY SYSTEMS FOR CONDENSING BOILERS

Single-wall and double-wall turbo chimney systems	4
Flexible flue pipes – Stalflex	7
Single-wall and double-wall turbo chimney systems – insulated	8

CHIMNEY SYSTEMS FOR CONVENTIONAL BOILERS

Acid-resistant chimney liners	10
Oval chimney liners	12
Double-walled insulated chimneys	13

CHIMNEY SYSTEMS FOR SOLID FUEL BOILERS

Acid-resistant single-wall matt	16
Heat-resistant single-wall chimney liners	17
Heat-resistant oval chimney liners	18
Heat-resistant double-walled insulated chimneys	20
INVEST heat-resistant double-walled chimneys	22
Black round chimney connections	24
Chimney connections for pellet-fired appliances	25

ACCESSORIES FOR CERAMIC CHIMNEYS 26

REDUCERS 27

CHIMNEY CAPS 29

CHIMNEY DOORS AND EXPANSION TANKS 31

VENTILATIONS SYSTEMS

Flex flexible aluminium pipes and accessories	32
Round air distribution system of the galvanised steel sheet	33
Air distribution system of the galvanised steel sheet with belling	34
Rectangular air distribution system of the galvanised steel sheet	35
Hot air distribution system	36
Ventilation chimneys insulated	37

AIR FLOW DUCTS 38

CLAMPS 39

THERMAL INSULATION SYSTEMS

Gray insulation - TER MAX ST	40
Red insulation - TER MAX PW and PWL	42
Blue insulation - TER MAX PW and PWL	43
Crimped protective pipes (corrugated pipes)	43
Accessories for insulation	44
Safety profiles	44

LAUNDRY CHUTES 45



CHIMNEY SYSTEMS FOR CONDENSING BOILERS

KOMIN-MAX TURBO I single-wall chimney systems are designed exhausting flue gases from appliances with a closed combustion chamber and condensing appliances.


KOMIN-MAX TURBO II double-wall chimney systems are designed for exhausting flue gases from appliances with a closed combustion chamber and condensing appliances, and at the same time for supplying air in a coaxial system.

Both systems operate under positive pressure, therefore silicone gaskets are used in all connections of exhaust components to maintain the appropriate positive pressure, therefore silicone gaskets are used in all connections of exhaust components to maintain the appropriate positive pressure and prevent possible condensate leakage. It is very important that the chimney system is assembled in such a way that condensate flows freely and does not accumulate, e.g., on the seals.

The hermetic combustion chamber allows the boiler to be installed in virtually any room.

SYSTEM CHARACTERISTICS				
SYSTEM PROPERTIES	KOMIN – MAX TURBO I		KOMIN – MAX TURBO II (TD*)	
Intended use	Heating devices with a closed combustion chamber and condensing devices		Heating devices with a closed combustion chamber and condensing devices	
Fuel types	gas, fuel oil		gas, fuel oil	
Core diameter range	60–100 mm; other diameters for individual orders		60/100–100/150 mm; other diameters for individual orders	
Corrosion resistance	Vm		Vm	
Max. operating temperature	200		200	
Material (exhaust pipe)	1,4404	1,4521	1,4404	1,4521
Material (air pipe)	1,4301	1,4509	1,4301	1,4509
Core material thickness	0,4 mm; 0,5 mm	0,4 mm; 0,6 mm	0,4 mm; 0,5 mm	0,4 mm; 0,6 mm
Type of operation flue gas duct	underpressure		overpressure	
Type of operation air duct	overpressure		underpressure	
Resistant to soot fires	O		O	
Approvals/certifications	CE 1450 – CPR – 0034		CE 1450 – CPR – 0034	
Warranty	5 years		5 years	

*The TD designation refers to trade and warehouse indexes

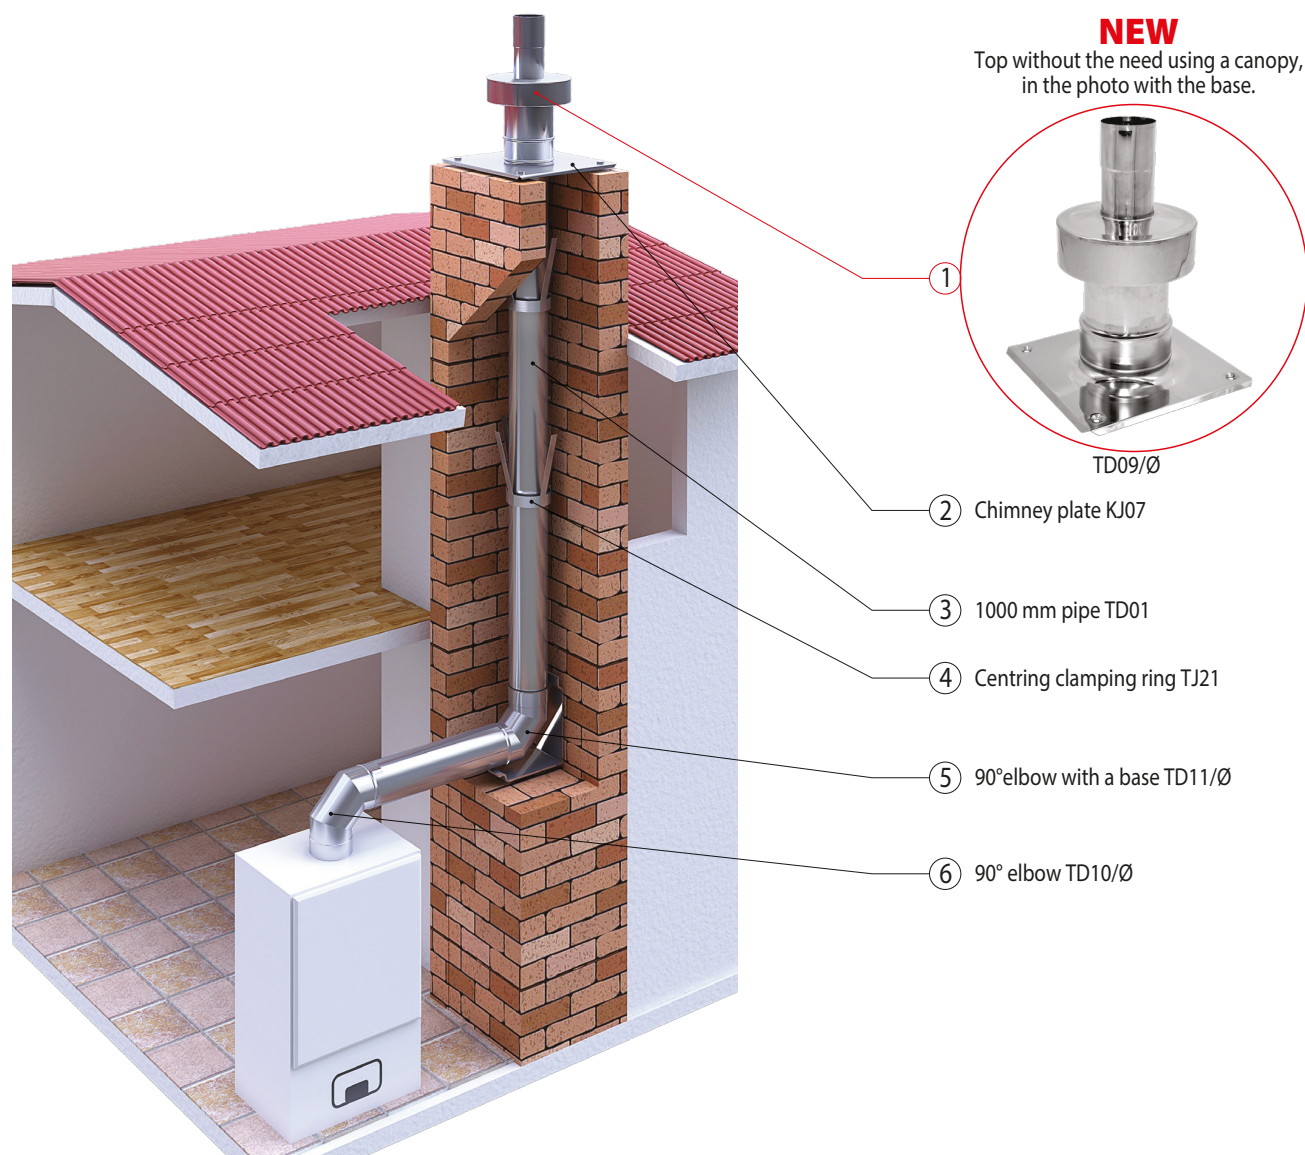

Single-wall turbo chimney systems (page 52 in catalogue)

COMPONENTS	INDEX	DIAMETER [mm]		
		60	80	100
Pipe 1000 [mm]	TJ01/Ø	77	77	86
Pipe 500 [mm]	TJ02/Ø	41	41	47
Pipe 330 [mm]	TJ03/Ø	29	29	32
Pipe 250 [mm]	TJ04/Ø	23	23	29
87° T-connection	TJ11/Ø	70	70	79
90° elbow	TJ06/Ø	57	57	64
90° elbow with base	TJ07/Ø	72	72	81
15° elbow	TJ08/Ø	32	32	38
30° elbow	TJ09/Ø	32	32	38
45° elbow	TJ10/Ø	32	32	38
90° elbow with a condensate collector	TJ27/Ø	89	89	100
Condensate collector	TJ13/Ø	-	-	-
Chimney plate	TJ20/Ø	70	70	74
Short chimney plate	KJ08/Ø	43	43	51
Umbrella - cap	KJ06/Ø	59	59	59
Side end pipe 250 [mm]	TJ05/Ø	40	40	47
Side end pipe 1000 [mm]	TJ31/Ø	77	77	95
Pipe with a condensate collector	TJ14/Ø	70	70	74
Pipe with a measurement stub	TJ15/Ø	56	56	62
Pipe with a condensate collector and a measurement stub	TJ16/Ø	76	76	83
Stopper	TJ12/Ø	31	31	35
Drip cap/cover frame	KJ32/Ø	26	26	26
Centring clamping ring – acid	TJ21/Ø	35	35	37
Centring clamping ring – plastic	TJ260-125	13		
Centring clamping ring – plastic	TJ60-200	13		
Bolted wall-mounted clamping ring	KJ20/Ø	35	35	35
Short chimney plate	TJ19/Ø	18	18	18
Reducer	TJ23/Ø	37	37	73
Gasket	TJ25/Ø	14	14	15

Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.



Double-wall turbo chimney systems (page 64 in catalogue)

COMPONENTS	INDEX	DIAMETER [mm]		
		60/100	80/125	100/150
Pipe 1000 [mm]	TD01/Ø	213	213	285
Pipe 500 [mm]	TD02/Ø	138	138	189
Pipe 330 [mm]	TD03/Ø	100	100	152
Pipe 250 [mm]	TD04/Ø	81	81	106
Side end pipe 1000 [mm]	TD05/Ø	227	227	311
Side end pipe 250 [mm]	TD06/Ø	110	110	154
Upper end pipe	TD08/Ø	106	106	146
Upper end pipe with a base	TD09/Ø	140	140	184
Cap	KJ06/Ø	59	59	59
90° T-connection	TD15/Ø	217	217	265
90° elbow	TD10/Ø	195	195	262
90° elbow with a base	TD11/Ø	209	209	276
15° elbow	TD12/Ø	124	124	160
30° elbow	TD13/Ø	124	124	160
45° elbow	TD14/Ø	124	124	160
90° elbow with a condensate collector	TD27/Ø	238	238	315
Condensate collector	TD17/Ø	43	43	52
Pipe with a measurement stub	TD18/Ø	119	119	146
Pipe with a condensate collector	TD19/Ø	133	133	158
Pipe with a condensate collector and a measurement stub	TD20/Ø	183	183	210
Reduction/transition	TD21/Ø	31	31	32
Bolted wall-mounted clamping ring	KJ20/Ø	35	35	36
Wall mounted clamping ring with a pin	KJ19/Ø	18	18	18
Stopper	TD16/Ø	46	46	54
Drip cap / cover frame	KJ32/Ø	26	26	32
Turbo distributor type A	TD24/Ø	185	185	271
Boiler adapter*	TD26/Ø	**		

Double-wall turbo chimney systems – WHITE

COMPONENTS	INDEX	DIAMETER [mm]		
		60/100	80/125	100/150*
Pipe 1000 [mm]	TDB01/Ø	234	234	–
Pipe 500 [mm]	TDB02/Ø	153	153	–
Pipe 330 [mm]	TDB03/Ø	110	110	–
Pipe 250 [mm]	TDB04/Ø	89	89	–
Side end pipe 1000 [mm]	TDB05/Ø	260	260	–
Side end pipe 250 [mm]	TDB06/Ø	128	128	–
90° T-connection	TDB15/Ø	240	240	–
90° elbow	TDB10/Ø	224	224	–
15° elbow	TDB12/Ø	125	125	–
30° elbow	TDB13/Ø	125	125	–
45° elbow	TDB14/Ø	125	125	–
Boiler adapter*	TD26/Ø	**		

*ask your sales representative about availability

Items marked in red are available in stock.


Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

Flexible exhaust pipes – STALFLEX (page 23 in catalogue)

COMPONENTS	INDEX	DIAMETER [mm]									
		60	80	100	110	115	120	125	130	135	140
Stalflex 1000 [mm]	KJ35/Ø	38	38	38	40	41	42	45	46	46	47
Stalflex pipe connector (upper)	ZK1/Ø	35	35	35	35	35	35	35	36	36	41
Stalflex pipe connector (lower)	ZK2/Ø	35	35	35	35	35	35	35	36	36	41
Stalflex pipe connector (nipple)	ZK3/Ø	35	35	35	35	35	35	35	36	36	41
Bell connector (TURBO)	ZK4/Ø; ZK5/Ø; ZK6/Ø	55	55	55	-	-	-	-	-	-	-
Attention!!! Max. length of a given diameter [mb]		25	25	25	20	20	20	20	20	20	20
available in sections [mb]		10	10	10	10	10	10	10	-	-	-

COMPONENTS	INDEX	DIAMETER [mm]					
		150	160	180	200	220	250
Stalflex 1000 [mm]	KJ35/Ø	49	55	60	65	94	104
Stalflex pipe connector (upper)	ZK1/Ø	50	56	60	71	78	84
Stalflex pipe connector (lower)	ZK2/Ø	50	56	60	71	78	84
Stalflex pipe connector (nipple)	ZK3/Ø	50	56	60	71	78	84
Attention!!! Max. length of a given diameter [mb]		20	20	20	20	20	6

* NOTE! – for selected diameters, transport costs are determined individually with the sales representative

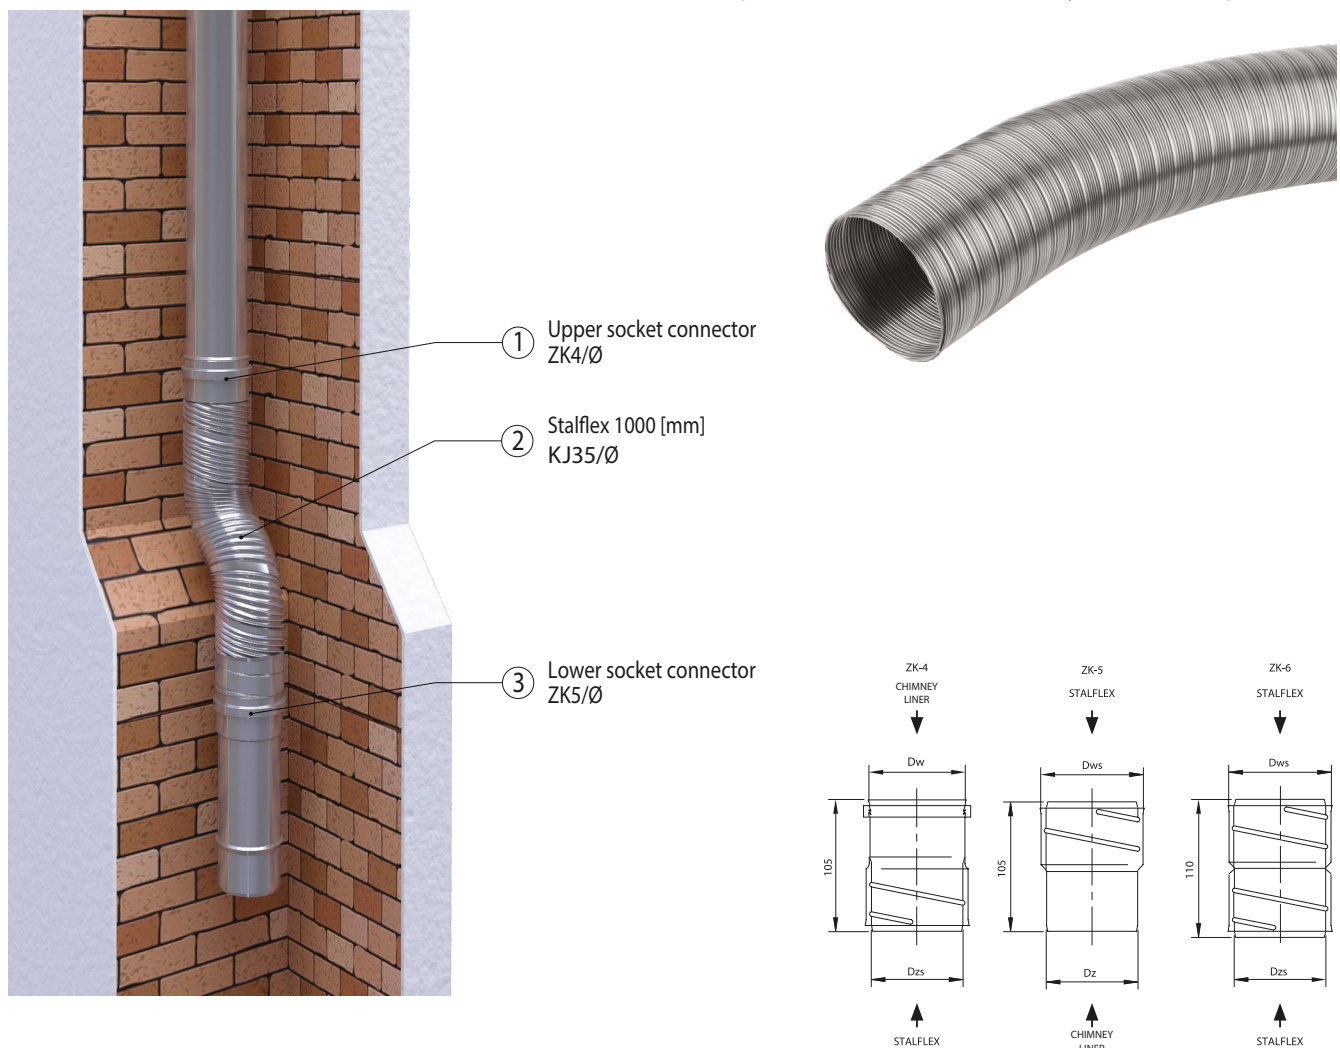

Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.




CHIMNEY SYSTEMS FOR CONDENSING BOILERS

TURBO I insulated chimney systems are designed to remove exhaust gases from boilers with closed combustion chambers and condensing boilers. They function as independent external chimneys, most often mounted on the wall of a building. They consist of: an inner pipe for exhaust gases, mineral wool insulation, and an outer shell. It is a system operating under positive pressure. Therefore, silicone seals are used in all connections to maintain the appropriate positive pressure and prevent possible condensate leakage. The insulation prevents the chimney from cooling down improving its performance.

TURBO II insulated chimney systems are designed to remove exhaust gases from appliances with a closed combustion chamber and condensing appliances, and at the same time to supply air in a coaxial system. They have insulation and an additional outer jacket.

CHARACTERISTICS OF MAX TURBO CHIMNEYS		
SYSTEM PROPERTIES	KOMIN MAX TURBO I INSULATED	KOMIN – MAX TURBO II INSULATED
Intended use	Heating devices with a closed combustion chamber and condensing devices	Heating devices with a closed combustion chamber and condensing devices
Fuel types	gas, fuel oil	gaz, olej opałowy
Core diameter range	60/100-100/150 mm; other diameter on individual order	60/100/160-100/150/200 mm; other diameter on individual order
Corrosion resistance	Vm	Vm
Max. operating temperature	200	200
Material (exhaust pipe)	1,4404; 1,4521	1,4404; 1,4521
Material (air pipe)	1,4301; 1,4509	1,4301; 1,4509
Material (external)	1,4301; 1,4509	1,4301; 1,4509
Core material thickness	0,4 – 0,6 mm	0,4 mm – 0,6 mm
Insulation material	mineral wool	mineral wool
Insulation thickness	20–25 mm	27,5-35 mm
Type of operation flue gas duct	underpressure	overpressure
Type of operation air duct	overpressure	underpressure
Resistant to soot fires	O	O
Warranty	5 years	5 years

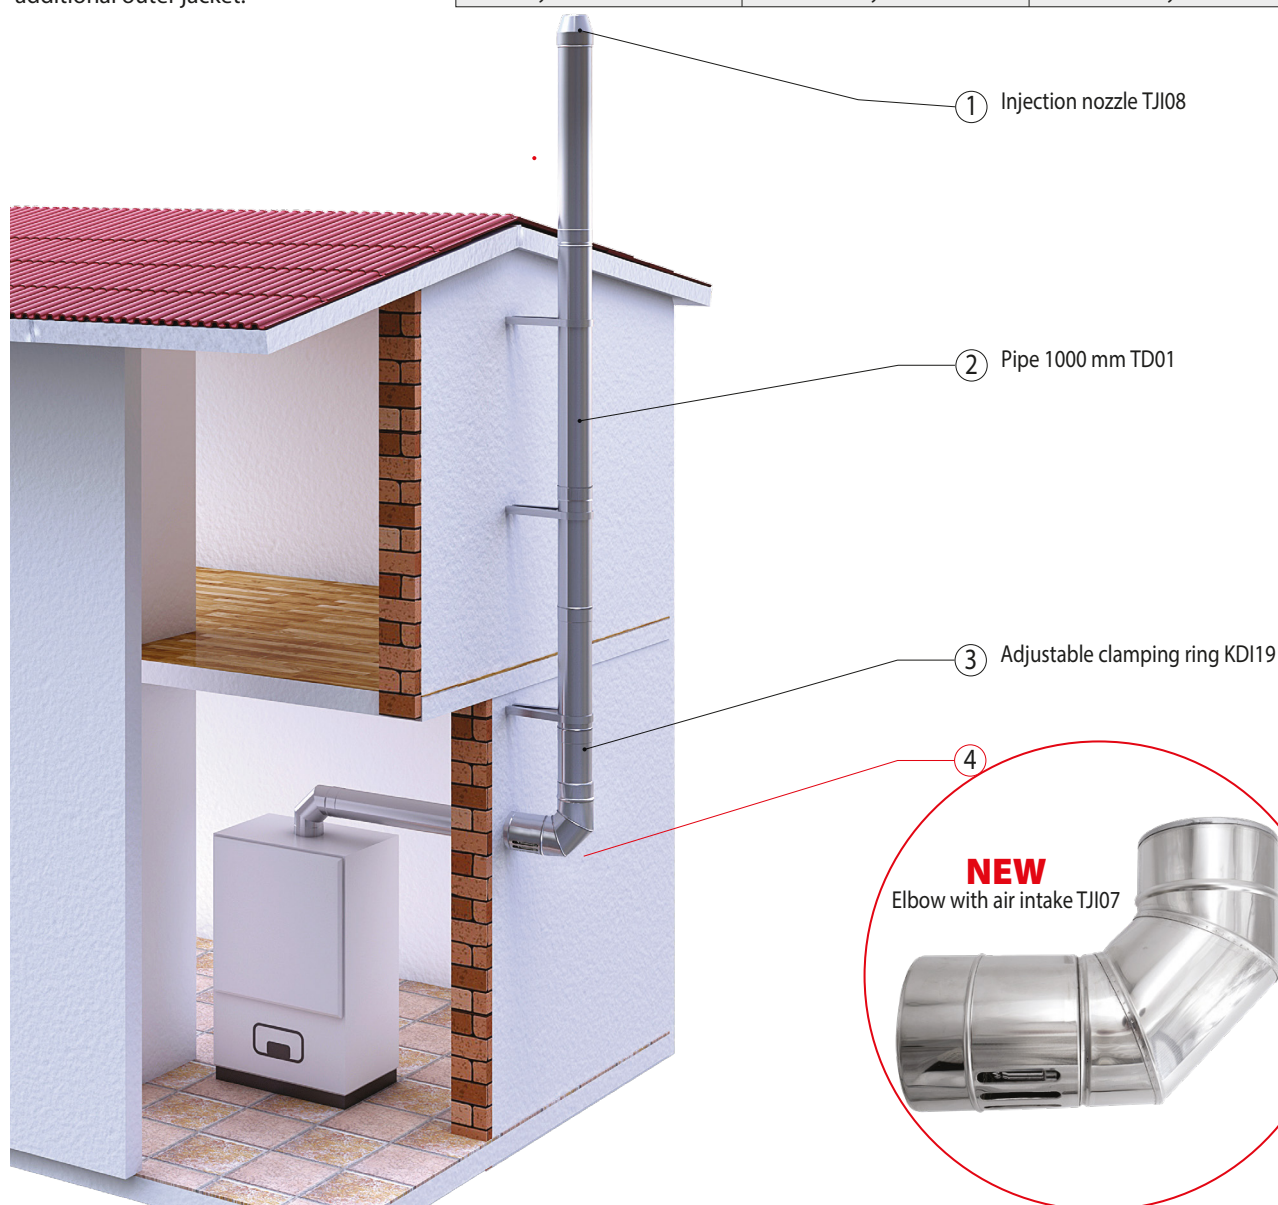

Single-wall turbo chimney systems – insulated^a (page 52 in catalogue)

COMPONENTS	INDEX	DIAMETER [mm]		
		60/100	80/125	100/150
Pipe 1000 [mm]	TJI01/Ø	271	271	339
Pipe 500 [mm]	TJI02/Ø	177	177	242
Pipe 300 [mm]	TJI03/Ø	128	128	193
Pipe 250 [mm]	TJI04/Ø	93	93	123
90° elbow	TJI05/Ø	260	260	350
45° elbow	TJI06/Ø	160	160	281
90° elbow with air intake	TJI07/Ø	363	363	490
Injection nozzle	TJI08/Ø	196	196	241
Umbrella - cap	KJ06/Ø	59	59	59
Adjustable clamping ring 50-100	KDI19/Ø/A	118	118	118
Adjustable clamping ring 100-200	KDI19/Ø/B	141	141	141
Adjustable clamping ring 250-350	KDI19/Ø/C	164	164	164
Adjustable clamping ring 400-500	KDI19/Ø/D	235	235	235
Wall mounted clamping ring with a pin	KDI25/Ø	45	53	64
90° T-connection	TJI14/Ø	264	264	450
90° T-connection with air intake	TJI15/Ø	426	426	537
Condensate collector	TJI16/Ø	58	58	68
Bracket with a plate	TJI17/Ø	296	296	309

Double-wall turbo chimney systems – insulated (page 64 in catalogue)

COMPONENTS	INDEX	ŚREDNICA [mm]		
		60/100/160	80/125/180	100/150/220
Pipe 1000 [mm]	TDI01/Ø	389	458	521
Pipe 500 [mm]	TDI02/Ø	235	278	331
Pipe 330 [mm]	TDI03/Ø	171	200	254
Pipe 250 [mm]	TDI04/Ø	133	155	182
90° elbow	TDI05/Ø	354	416	472
45° elbow	TDI06/Ø	210	248	352
Upper End Pipe	TDI07/Ø	254	316	338
Adjustable clamping ring 50-100	KDI19/Ø/A	129	141	176
Adjustable clamping ring 100-200	KDI19/Ø/B	154	169	211
Adjustable clamping ring 250-350	KDI19/Ø/C	164	182	226
Adjustable clamping ring 400-500	KDI19/Ø/D	235	260	323
Wall mounted clamping ring with a pin	KDI25/Ø	64	64	64
90° T-connection	TDI08/Ø	416	493	495
Condensate Collector	TDI09/Ø	113	142	142
Bracket with a plate	TDI10/Ø	296	438	465

Items marked in red are available in stock.


Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

Single-wall KOMIN-MAX chimney systems made of acid-resistant steel sheet are designed for the removal of exhaust gases from gas or fuel oil-fired appliances. The KOMIN-MAX chimney liner is used for ceramic chimney flues in new buildings as well as for repairing old chimneys. Individual elements of the acid-resistant chimney liner with the same diameter are connected in a chimney set thanks to specially prepared bell-shaped ends, which allow for free thermal expansion of the liner. The advantage of the product is its quick and easy installation and smooth wall surface, which translates into lower air resistance and reduces soot deposition. The single-wall acid-resistant chimney system is available in round and oval versions.

CHARACTERISTICS OF MAX TURBO CHIMNEYS			
SYSTEM PROPERTIES	KOMIN – MAX (KJ*, KKJ**)		KOMIN – MAX OWAL
Intended use	Heating devices with a open combustion chamber		Heating devices with a open combustion chamber
Fuel types	gas, fuel oil		gas, fuel oil
Core diameter range	80-400 mm; other diameter on individual order		100/150-200/250 mm; other diameter on individual order
Corrosion resistance	Vm		
Max. operating temperature	450	600	600
Material (exhaust pipe)	1,4404; 1,4301	1,4404; 1,4301	1,4301; 1,4404; 1,4509; 1,4521
Core material thickness	0,5 mm (DN80, DN250)	0,6 mm, 0,8 mm; 1,00 mm (DN80, DN500)	0,6 mm; 0,8 mm; 1.00 mm
Type of operation	underpressure		underpressure
Resistant to soot fires	G		G
Approvals/certifications	CE 1450 – CPR – 0010		CE 1450 – CPR – 0010
Warranty	5 years		5 years

*The KJ, KKJ designation refers to trade and warehouse indexes

**The KKJ designation refers to matt version: 1,4404; thickness 1,00 mm; T. 600; warranty period 2 years

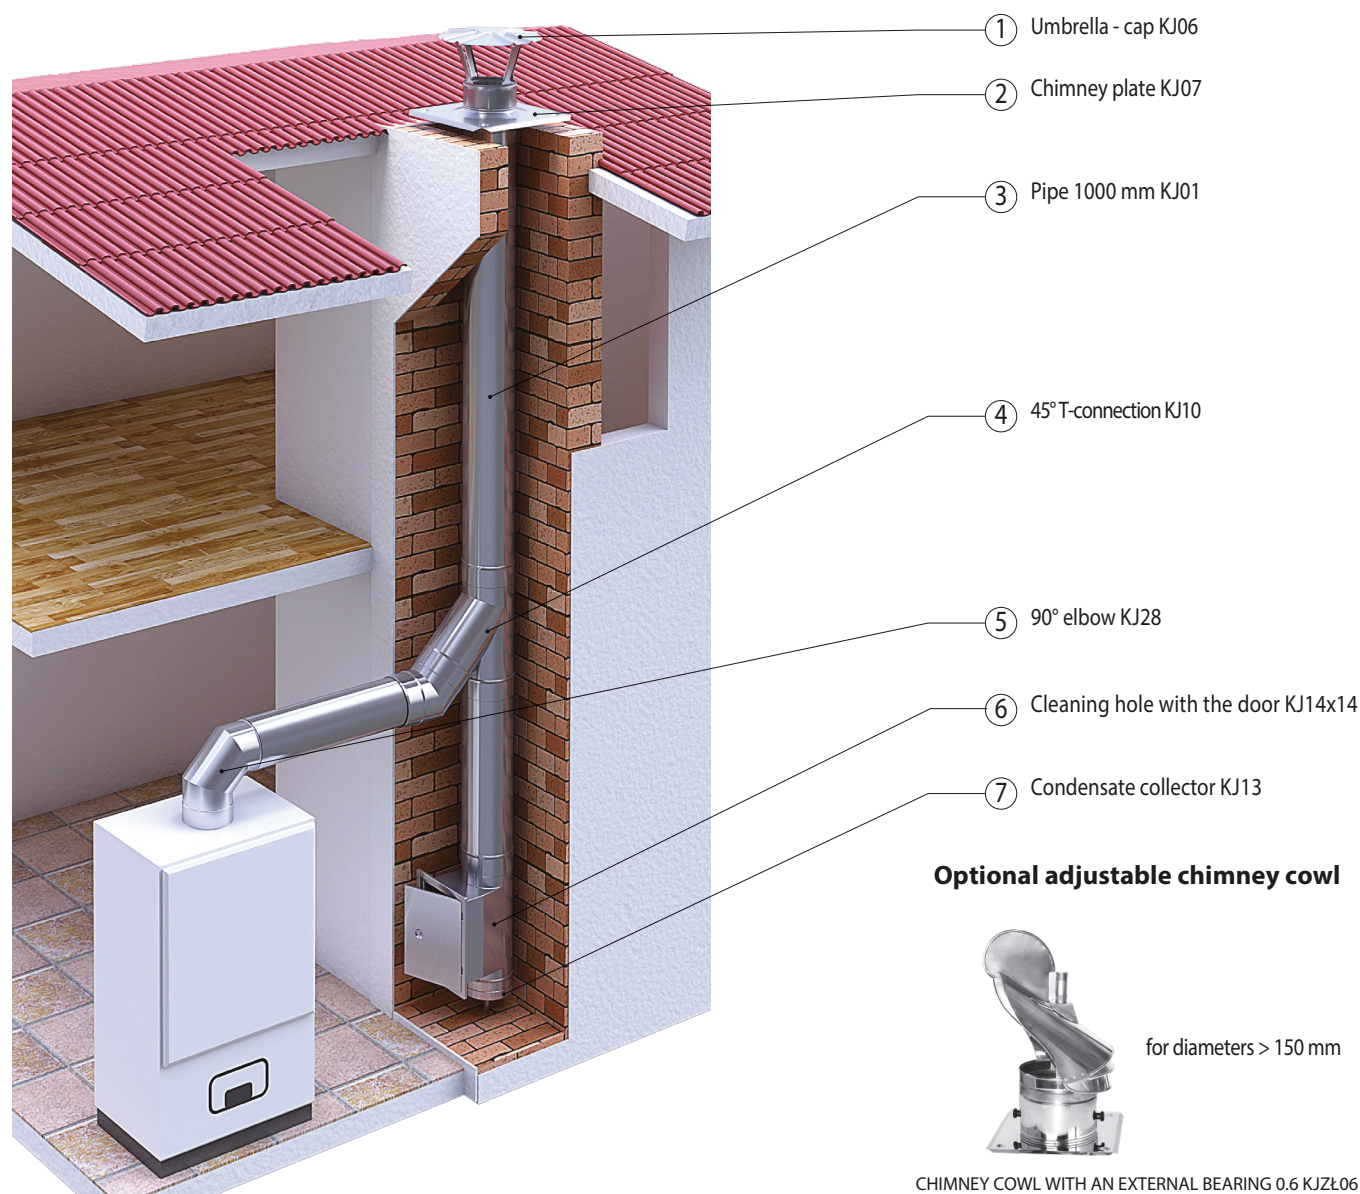



Single-wall chimney systems (page 8 in catalogue)

COMPONENTS	INDEX	DIAMETER [mm]																	
		*80	100	110	113	115	120	125	130	140	150	160	180	200	220	250	300	350	400
Pipe 1000 [mm]	KJ01/Ø	77	83	89	93	95	95	99	102	112	122	127	137	152	190	211	310	350	401
Pipe 500 [mm]	KJ02/Ø	41	52	55	56	60	60	60	60	67	76	76	84	95	112	126	185	208	239
Pipe 330 [mm]	KJ03/Ø	29	35	38	38	39	39	39	45	45	54	54	59	62	76	84	122	142	178
Pipe 250 [mm]	KJ04/Ø	23	23	31	31	35	35	35	35	40	42	44	47	53	65	73	108	118	136
87° T-connection	KJ09/Ø	77	77	81	83	88	88	90	91	102	108	124	139	147	166	188	221	255	342
45° T-connection	KJ10/Ø	95	95	100	105	110	110	116	117	125	135	156	175	185	206	237	352	404	459
T-connection „Portki“	KJ26/Ø	235	235	235	235	235	235	235	235	235	235								
0°-90° adjustable elbow	KJ15/Ø	59	59	63	67	70	70	72	74	81	84	94	102	113	117	120	163	185	
90° elbow	KJ28/Ø	73	73	76	80	85	85	86	89	97	97	112	123	136	154	157	213	242	268
90° elbow with cleanout	KJ70/Ø	100	100	103	110	116	116	119	122	134	134	154	171	188	211	216	294	334	370
15° elbow	KJ29/Ø/15	41	41	45	51	53	53	53	55	61	61	64	68	78	81	99	117	122	154
30° elbow	KJ29Ø/30	41	41	45	51	53	53	53	55	61	61	64	68	78	81	99	117	122	154
45° elbow	KJ29Ø/45	41	41	45	51	53	53	53	55	61	61	64	68	78	81	99	117	122	154
Round cleaning hole	KJ12/Ø	91	91	99	101	107	107	109	113	122	129	151	166	178	197	218	252	286	373
Cleaning hole with the door 140x140	KJ14x14/Ø	142	142	150	152	156	156	160	164										
Cleaning hole with the door 140x210	KJ14x21/Ø									196	202	233	241	250	274	298	343	381	486
Cleaning hatch extension 140x140 L-250	KJ45/140/140	56	56	56	56	56	56	56	56	56	56	56	56	56	56	56	56	56	56
Cleaning hatch extension 140x210 L-250	KJ45/140/210	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67
Condensate collector	KJ13/Ø	30	30	30	30	30	30	30	30	39	39	39	39	39	83	83	83	83	83
Condensate collector with a base	KJ14/Ø	73	73	73	73	73	73	73	73	85	85	85	85	85	101	101	101	101	101
Condensate collector with a side outlet	KJ58/Ø	73	73	73	73	73	73	73	73	85	85	85	85	85	101	101	101	101	101
Straight pipe with a condensate collector	KJ59/Ø	77	77	80	83	85	85	88	91	101	107	110	119	132	140	158	184	208	229
Chimney plate	KJ07/Ø	77	77	80	83	87	87	90	91	102	108	112	121	133	141	160	185	210	230
Short chimney plate	KJ08/Ø	53	53	53	53	53	53	53	56	56	56	56	64	72	72	107	127	152	195
Large cap	KJ06/Ø	59	59	59	59	64	64	64	64	72	75	75	88	92	120	128	140	164	200
Telescopic pipe	KJ05/Ø	87	94	98	100	101	101	107	110	117	130	131	155	186	213	238	295	331	391
Chimney cap against condensation	KJ44/Ø												141	141	141				
Pressed reducer T1, T2	KJ17/Ø, KJ18/Ø	reduction prices on pages 27 and 28																	
Segment reduction S1, S2	KJ36/Ø, KJ37/Ø																		
Wall mounted clampingring with a pin	KJ19/Ø	18	18	18	18	18	18	18	18	18	18		37	42	48				
Reinforced clamping ring with a pin	KDI25/Ø		45					53			64	64	64	64	64	108	108	108	127
Bolted wall-mounted clamping ring	KJ20/Ø	35	35	35	35	35	35	35	35	36	36	36	36	36	43	43	43	43	43
Connection clamping ring	KJ27/Ø	24	24	25	25	29	29	30	30	32	35	36	41	47	53	58	73	79	95
Stopper	KJ25/Ø	25	25	25	25	25	25	25	25	32	32	32	32	32	43	43	43	43	43
Drip cap, cover frame	KJ32/Ø	26	26		26	26	26	28	28	29	32	33	39	44	47	54	67	84	99
Two-socket connector	KJ33/Ø	29	29	29	29	32	32	32	32	36	36	39	40	46	55	64	92	101	118
Double nipple	KJ34/Ø	29	29	29	29	32	32	32	32	36	36	39	40	46	55	64	92	101	118
Adapter support	KJ16/Ø	98	98	101	106	109	109	117	118	129	136	143	166	168	180	205	234	265	294
Hose for the condensate collector	KJ55/12	11 / mb																	

*ask your sales representative about availability

Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

Oval chimney systems (page 24 in catalogue)

COMPONENTS	INDEX	[conversion to Ø] SIZE (available in various sizes)					
		[160] 100/200	[180] 100/220	[180] 120/200	[180] 120/220	[200] 120/240	[210] 140/250
Pipe 1000 [mm]	KO01/rozmiar	213	230	251	251	260	291
Pipe 500 [mm]	KO02/rozmiar	121	131	143	143	147	163
Pipe 330 [mm]	KO05/rozmiar	109	114	122	122	127	137
Pipe 250 [mm]	KO03/rozmiar	75	82	84	84	92	98
45° T-connection, long side	KO14/rozmiar	250	272	278	278	292	348
45° T-connection, short side	KO20/rozmiar	296	322	332	332	349	405
87° T-connection, long side	KO04/rozmiar	184	200	206	206	213	255
87° T-connection, short side	KO22/rozmiar	228	246	255	255	266	300
45° elbow, short side	KO07/rozmiar	122	131	134	134	136	168
45° elbow, long side	KO08/rozmiar	117	121	128	128	131	161
90° elbow, short side	KO09/rozmiar	172	178	186	186	189	217
90° elbow, long side	KO10/rozmiar	164	171	176	176	180	205
Cleaning hole with a round stopper, long side	KO06/rozmiar	217	224	228	228	230	255
Cleaning hole with a round stopper, short side	KO23/rozmiar	257	266	270	270	274	283
Cleaning hole with the door, 140x140 long side	KO16/rozmiar	329	337	342	342	347	377
Cleaning hole with the door, 140x140 short side	KO24/rozmiar	385	394	398	398	402	435
Cleaning hole with the door, 140x210 long side	KO17/rozmiar	350	359	363	363	366	398
Cleaning hole with the door, 140x210 short side	KO25/romiar	407	414	420	420	430	0
Cleaning hatch extension 140x140 L-250	KJ45/140/140	62	62	62	62	62	62
Cleaning hatch extension 140x210 L-250	KJ45/140/210	47	74	74	74	74	74
Condensate collector	KO11/rozmiar	118	127	131	131	134	150
Condensate collector with a side drain, long side	KO15/rozmiar	153	164	172	172	183	193
Condensate collector with a side drain, short side	KO28/rozmiar	153	164	172	172	183	193
Pass-through chimney plate	KO21/rozmiar	105	111	116	120	128	132
Chimney plate	KO13/rozmiar	140	152	164	164	177	196
Oval reduction, no plate, Ø150	KO29/rozmiar/Ø	122	122	122	128	155	155
Oval reduction, no plate, Ø180	KO29/rozmiar/Ø	128	128	128	128	155	155
Oval reduction, no plate, Ø200	KO29/rozmiar/Ø	155	155	155	155	155	155
Adapter for chimney cowl Ø150 with a plate	KO30/rozmiar/Ø	175	175	175	177	177	218
Adapter for chimney cowl Ø160 with a plate	KO30/rozmiar/Ø	193	193	193	195	195	240
Adapter for chimney cowl Ø180 with a plate	KO30/rozmiar/Ø	195	195	195	195	195	240
Adapter for chimney cowl Ø200 with a plate	KO30/rozmiar/Ø	230	230	230	230	230	240
“Umbrella” cap	KO12/rozmiar	114	117	120	120	127	143
Drip cap/cover frame	KO22/rozmiar	88	95	99	103	109	114

Items marked in red are available in stock.


Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

KOMIN-MAX DUO double-wall chimney systems made of acidresistant steel sheet are designed for the removal of exhaust gases from gas or fuel oil-fired appliances as free-standing chimneys. The external chimney is particularly exposed to temperature differences, so the use of insulation prevents chimney draft disturbances. The system consists of:

- an inner pipe for exhaust gas discharge
- mineral wool insulation
- outer jacket.

The components are joined using plasma welding. The argon used in this process prevents the steel from oxidizing, allowing for excellent tightness and surface smoothness. The system is resistant to soot fires. The outer jacket and other components can be made from other corrosion-resistant materials. The thermal insulation is made of non-combustible mineral wool resistant to continuous high temperatures.

SYSTEM CHARACTERISTICS	
SYSTEM PROPERTIES	KOMIN – MAX DUO
Intended use	Heating devices with an open combustion chamber
Fuel types	gas, fuel oil
Diameter range	130/200-500/600 mm; other diameters available on request
Corrosion resistance	Vm
Max. operating temperature	600
Core material	internal.: 1,4404; external.: 1,4301
Core material thickness	internal.: 0,6/0,8/1,0 mm; external.: 0,6 mm
Insulation	mineral wool
Insulation thickness	30 – 50 mm
Type of operation	underpressure
Resistant to soot fire	G
Approvals/certificates	CE 1450 – CPR – 0010
Warranty	5 years

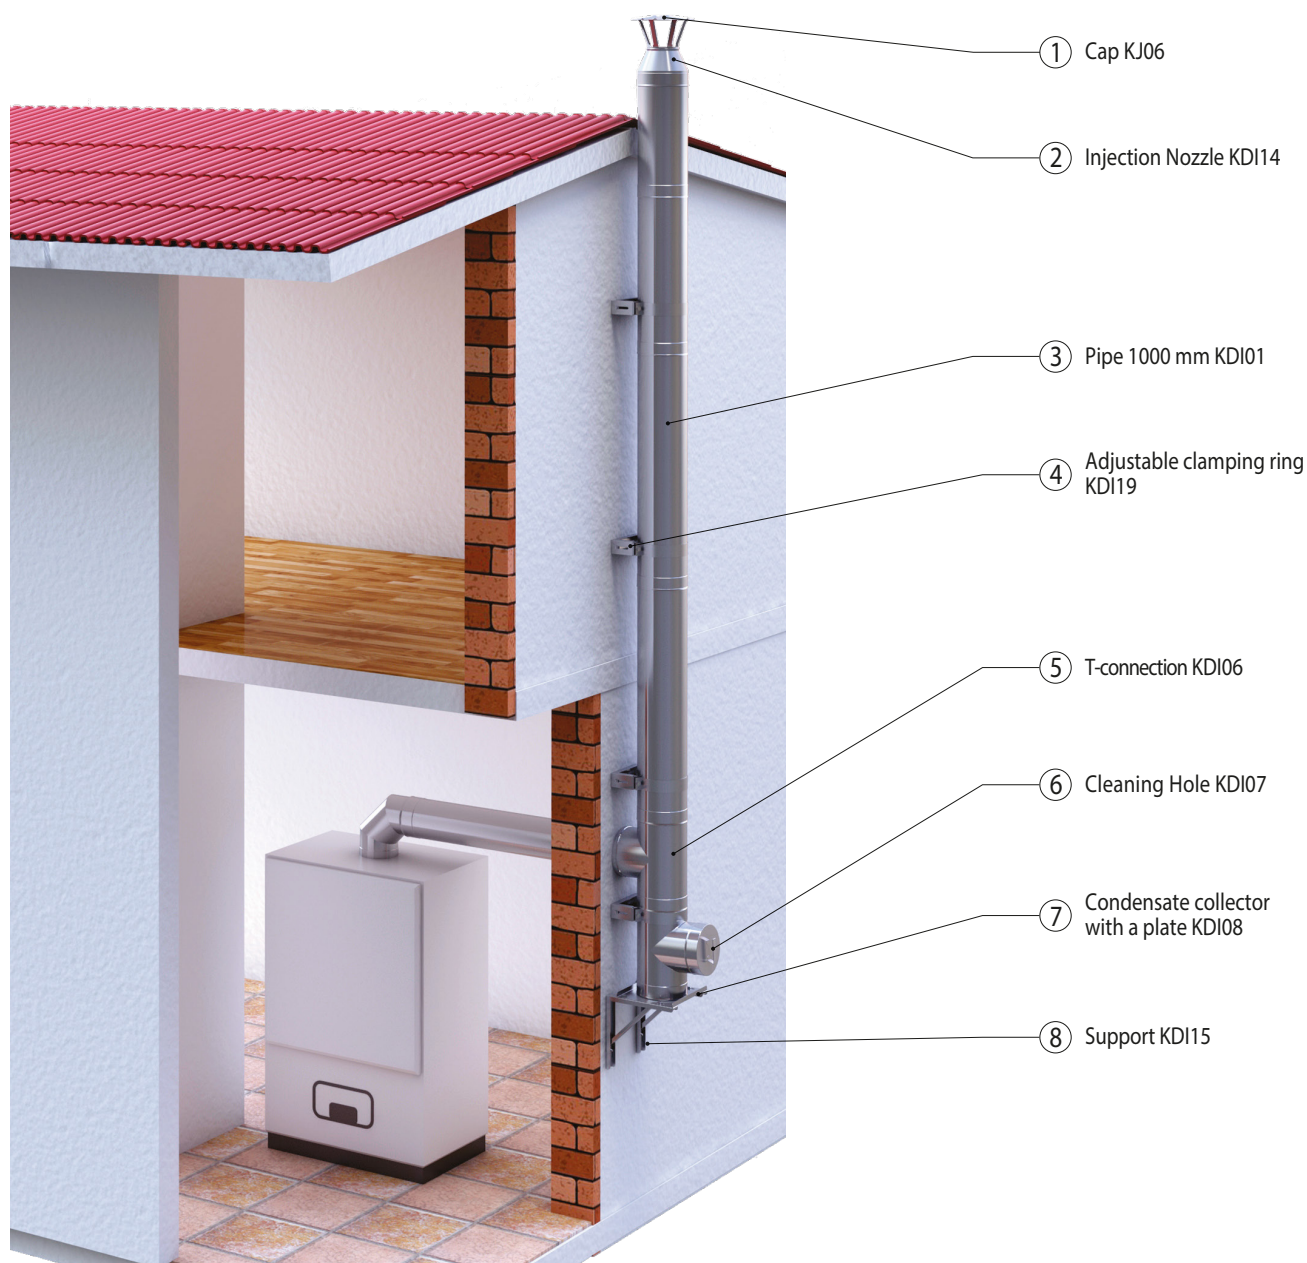

Double-wall chimney systems insulated (page 32 in catalogue)

COMPONENTS	INDEX	DIAMETER [mm]							
		100/160	120/180	130/200	140/200	150/220	160/220	180/250	200/260
Pipe 1000 [mm]	KDI01/Ø	303	325	350	361	388	420	464	510
Pipe 500 [mm]	KDI02/Ø	191	209	238	258	258	286	315	351
Pipe 330 [mm]	KDI03/Ø	174	191	218	225	225	238	266	270
Pipe 250 [mm]	KDI04/Ø	151	166	190	201	201	209	220	225
45° T-connection	KDI05/Ø	456	491	528	561	585	618	681	749
87° T-connection	KDI06/Ø	354	381	410	422	454	472	529	582
15° elbow	KDI09/Ø	270	290	312	321	345	359	402	443
30° elbow	KDI10/Ø	270	290	312	321	345	359	402	443
45° elbow	KDI11/Ø	270	290	312	321	345	359	402	443
60° elbow	KDI12/Ø	318	342	368	379	408	424	475	523
90° elbow	KDI13/Ø	318	342	368	379	408	424	475	423
Cleaning hole with a stopper	KDI07/Ø	424	456	491	506	544	566	634	697
Cleaning hole with the door 140x140	KDI23/Ø	554	596	640	660	710	738	827	910
Cleaning hole with the door 140x210	KDI29/Ø	563	606	651	672	722	751	841	925
Condensate collector	KDI21/Ø	112	123	214	134	136	249	279	263
Condensate collector with a base	KDI22/Ø	223	240	258	266	286	297	333	366
Condensate collector with a plate	KDI08/Ø	209	198	221	228	245	255	304	331
Insulated chimney plate	KDI24/Ø	191	205	221	228	245	255	285	314
Insulated cap	KDI28/Ø	154	169	180	200	204	213	239	263
Injection nozzle	KDI14/Ø	149	160	172	180	190	201	222	244
Injection nozzle for chimney cowl	KDI30/Ø	159	180	197	206	206	227	234	249
Bracket - adjustable 50-100 (2 pcs)	KDI15/Ø/100	176	194	220	220	287	287	287	287
Bracket - adjustable 100-200 (2 pcs)	KDI15/Ø/200	194	212	241	241	314	314	314	314
Bracket - adjustable 250-350 (2 pcs)	KDI15/Ø/350	234	254	290	290	377	377	377	377
Bracket - adjustable 400-500 (2 pcs)	KDI15/Ø/500	327	358	405	405	528	528	528	528
Adapter Support	KDI16/Ø	182	200	227	231	240	243	311	340
Roof Adapter (0°-30°)	KDI31/Ø/0-30	145	160	183	193	193	211	229	232
Roof Adapter (10°-40°)	KDI31/Ø/10-40	145	160	183	193	193	211	229	232
Roof Adapter (20°-50°)	KDI31/Ø/20-50	145	160	183	193	193	211	229	232
Roof Adapter (30°-60°)	KDI31/Ø/30-60	145	160	183	193	193	211	229	232
Reducer	KDI20/Ø	354	389	446	446	498	498	551	682
Reinforcing clamping ring	KDI18/Ø	42	46	58	58	64	64	72	78
Adjustable clamping ring 50-100	KDI19/Ø/100	129	141	165	165	176	176	187	198
Adjustable clamping ring 100-200	KDI19/Ø/200	154	169	198	198	211	211	223	238
Adjustable clamping ring 250-350	KDI19/Ø/350	164	182	212	212	226	226	240	254
Adjustable clamping ring 400-500	KDI19/Ø/500	235	260	303	303	323	323	341	363
Reinforced clamping ring with a pin	KDI25/Ø	64	64	64	64	64	64	64	64
Clamping ring for the exhauster	KDI26/Ø	94	94	94	101	109	109	109	109
Drip cap / cover frame	KJ32/Ø	36	42	48	48	53	53	59	74
Insulated chimney extension 500 [mm]	KDI32/Ø	296	325	370	399	399	443	489	545
Insulated chimney extension 1000 [mm]	KDI33/Ø	400	440	500	533	561	650	710	740

Items marked in red are available in stock.


Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

CHIMNEY SYSTEMS FOR CONVENTIONAL BOILERS



COMPONENTS	INDEX	DIAMETER [mm]							
		200/300	220/300	250/350	300/400	350/450	400/500	450/550	500/600
Pipe 1000 [mm]	KDI01/Ø	632	657	736	820	1048	1146	1373	1523
Pipe 500 [mm]	KDI02/Ø	384	399	447	501	576	662	762	876
Pipe 330 [mm]	KDI03/Ø	302	314	352	394	453	521	599	894
Pipe 250 [mm]	KDI04/Ø	275	286	320	358	412	474	668	627
45° T-connection	KDI05/Ø	928	964	1080	1210	1391	1600	1840	2116
87° T-connection	KDI06/Ø	721	749	839	940	1081	1243	1429	1643
15° elbow	KDI09/Ø	548	570	638	715	822	945	1087	1250
30° elbow	KDI10/Ø	548	570	638	715	822	945	1087	1250
45° elbow	KDI11/Ø	548	570	638	715	822	945	1087	1250
60° elbow	KDI12/Ø	647	504	570	655	755	838	947	1090
90° elbow	KDI13/Ø	648	673	754	844	971	1116	1284	1476
Cleaning hole with a stopper	KDI07/Ø	863	897	1005	1125	1294	1488	1711	1968
Cleaning hole with the door 140x140	KDI23/Ø	1127	1054	1311	1468	1689	1942	2233	2568
Cleaning hole with the door 140x210	KDI29/Ø	1146	1191	1334	1494	1718	1976	2272	2613
Condensate collector	KDI21/Ø	325	338	379	424	488	561	645	740
Condensate collector with a base	KDI22/Ø	453	471	527	591	606	825	1033	1138
Condensate collector with a plate	KDI08/Ø	389	404	452	506	661	882	1047	1137
Insulated chimney plate	KDI24/Ø	389	404	452	506	582	670	770	886
Insulated cap	KDI28/Ø	326	338	379	424	488	561	645	746
Injection nozzle	KDI14/Ø	302	314	319	394	453	521	599	689
Injection nozzle for chimney cowl	KDI30/Ø	301	313	345	371	451	519	597	686
Bracket - adjustable 50-100 (2 pcs)	KDI15/Ø/100	372	372	372	451	383	505	505	550
Bracket - adjustable 100-200 (2 pcs)	KDI15/Ø/200	409	409	409	495	495	557	557	604
Bracket - adjustable 250-350 (2 pcs)	KDI15/Ø/350	492	492	492	595	595	668	668	725
Bracket - adjustable 400-500 (2 pcs)	KDI15/Ø/500	690	690	690	832	832	935	935	1013
Adapter Support	KDI16/Ø	362	362	406	487	615	716	979	1168
Roof Adapter (0°-30°)	KDI31/Ø/0-30	246	246	310	349	384	421	458	475
Roof Adapter (10°-40°)	KDI31/Ø/10-40	246	246	310	349	384	421	458	475
Roof Adapter (20°-50°)	KDI31/Ø/20-50	246	246	310	349	384	421	458	475
Roof Adapter (30°-60°)	KDI31/Ø/30-60	246	246	310	349	384	421	458	475
Reducer	KDI20/Ø	679	679	679	679	857	1122	1239	1503
Reinforcing clamping ring	KDI18/Ø	91	91	98	110	119	128	139	156
Adjustable clamping ring 50-100	KDI19/Ø/100	231	231	296	341	396	461	505	570
Adjustable clamping ring 100-200	KDI19/Ø/200	277	277	356	409	475	553	607	686
Adjustable clamping ring 250-350	KDI19/Ø/350	298	298	380	437	508	591	649	732
Adjustable clamping ring 400-500	KDI19/Ø/500	424	424	543	626	726	845	926	1045
Reinforced clamping ring with a pin	KDI25/Ø	64	64	108	108	108	127	127	127
Clamping ring for the exhauster	KDI26/Ø	109	109	109	109	129	129	129	129
Drip cap / cover frame	KJ32/Ø	74	74	90	101	127	140	155	169
Insulated chimney extension 500 [mm]	KDI32/Ø	575	635	710	798	945	1091	1240	1388
Insulated chimney extension 1000 [mm]	KDI33/Ø	784	903	1063	1270	1624	1778	2128	2360

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.



CHIMNEY SYSTEMS FOR SOLID FUEL BOILERS

Single-wall chimney systems such as **KOMIN-MAX ŽARO** made of heat-resistant steel sheet and **KOMIN MAX MAT** made of acid-resistant steel sheet are designed for the removal of exhaust gases from devices fired with wood and eco-friendly solid fuels.

The KOMIN-MAX ŽARO chimney liner is used for ceramic chimney flues in new buildings, but also for repairing old chimneys.

Individual elements of the heatresistant chimney liner with the same diameter are connected into a chimney set thanks to specially prepared bell-shaped ends, which allow for free thermal expansion of the liner.

SYSTEM CHARACTERISTICS			
SYSTEM PROPERTIES	KOMIN – MAX (KJ**, KKJ***)		KOMIN – MAX ŽARO
Intended use	Heating devices with an open combustion chamber		Heating devices with an open combustion chamber
Fuel types	gaz, olej opałowy		gas, fuel oil, wood, eco-friendly solid fuels, coal*
Diameter range	80-400 mm; other diameters available on request		80-140 mm; other diameters available on request
Corrosion resistance	Vm		Vm
Max. operating temperature	450		600
Material (exhaust pipe)	1,4404; 1,4301	1,4404; 1,4301	1,4828
Core material thickness	0,5 mm (DN80, DN250)	0,6 mm, 0,8 mm; 1,00 mm (DN80, DN500)	0,8 mm; 1.00 mm
Type of operation	underpressure		underpressure
Resistant to soot fire	G		G
Approvals/certificates	CE 1450 – CPR – 0010		CE 1450 – CPR – 0010
Warranty	5 years		2 years

*in process of certification/depending on version

**The KJ, KKJ designation refers to trade and warehouse indexes

***The KKJ designation refers to matt version: 1,4404; thickness 1,00 mm; T. 600; warranty period 2 years

Acid-resistant single-wall matt (page 8 in catalogue)****

COMPONENTS	INDEX	DIAMETER [mm]			
		150	160	180	200
Pipe 1000 [mm]	KKJ01/Ø	246	270	293	324
Pipe 500 [mm]	KKJ02/Ø	148	162	175	197
Pipe 330 [mm]	KKJ18/Ø	106	114	121	131
Pipe 250 [mm]	KKJ03/Ø	90	95	102	114
87° T-connection	KKJ10/Ø	197	213	228	249
0°-90° adjustable elbow	KKJ15/Ø	261	276	300	325
Cleaning hole with a stopper	KKJ11/Ø	233	242	249	257
Cleaning hole with the door 140x140	KKJ19/140/140/Ø	311	318	325	336
Cleaning hole with the door 140x210	KKJ21/140/210/Ø	338	345	353	363
Cleaning hatch extension 140x140 L-250	KKJ40/140/140	89	89	89	89
Cleaning hatch extension 140x210 L-250	KKJ40/140/210	108	108	108	108
Condensate collector	KKJ12/Ø	66	72	81	91
Condensate collector with a side outlet	KKJ17/Ø	92	101	124	128
Chimney plate	KKJ16/Ø	173	180	196	213
Umbrella cap	KKJ13/Ø	119	138	158	177
Pressed reducer T1, T2	KKJ30/Ø, KKJ31/Ø	reduction prices on pages 27 and 28			
Segment reduction S1, S2	KKJ32/Ø, KKJ33/Ø				
Wall mounted clamping ring with a pin	KJ19/Ø	19	34	42	46
Reinforced clamping ring with a pin	KDI25/Ø	70	70	70	70

****ask your sales representative about availability

Heat-resistant single-wall chimney systems (page 8 in catalogue)

COMPONENTS	INDEX	DIAMETER [mm]												
		100	110	120	125	130	140	150	160	180	200	220	250	300
Pipe 1000 [mm]	KŽJ01/Ø	146	146	162	169	181	192	203	222	242	268	292	328	388
Pipe 500 [mm]	KŽJ02/Ø	95	95	104	109	115	126	139	151	164	184	204	233	253
Pipe 330 [mm]	KŽJ18/Ø	77	77	84	86	90	102	109	115	121	133	140	161	168
Pipe 250 [mm]	KŽJ03/Ø	59	59	66	68	73	82	90	95	104	115	121	142	151
45° T-connection	KŽJ09/Ø	160	160	179	188	198	210	220	241	263	295	329	386	488
87° T-connection	KŽJ10/Ø	123	123	138	152	158	164	172	185	198	216	231	257	325
15° elbow	KŽJ04/Ø	86	86	96	100	105	110	113	118	123	131	140	150	182
30° elbow	KŽJ05/Ø	86	86	96	100	105	110	113	118	123	131	140	150	182
45° elbow	KŽJ06/Ø	86	86	96	100	105	110	113	118	123	131	140	150	182
90° elbow	KŽJ07/Ø	135	135	152	160	168	174	182	189	198	217	231	253	299
90° elbow with cleanout*	KŽJ08/Ø	177	177	198	207	220	230	238	251	260	286	299	331	391
Adjustable elbow	KŽJ15/Ø	188	194	196	200	202	215	227	240	261	282	323	360	442
Cleaning hole with a round stopper	KŽJ11/Ø	157	157	173	185	195	198	202	210	216	226	256	285	359
Cleaning hole with the door 140x140	KŽJ19/Ø	221	221	240	251	262	264	271	277	282	292	309	329	365
Cleaning hole with the door 140x210	KŽJ21/Ø	244	244	262	275	285	288	294	301	306	316	333	353	387
Cleaning hatch extension 140x140 L-250	KŽJ26/140/140	79	79	79	79	79	79	79	79	79	79	79	79	79
Cleaning hatch extension 140x210 L-250	KŽJ26/140/210	94	94	94	94	94	94	94	94	94	94	94	94	94
Condensate collector	KŽJ12/Ø	47	47	54	55	58	61	62	68	76	87	95	105	114
Condensate collector with a side outlet	KŽJ17/Ø	75	75	85	86	92	94	95	106	127	133	151	162	180
Chimney plate	KŽJ16/Ø	118	122	131	140	141	154	164	172	186	202	217	245	282
Short chimney plate	KJ08/Ø	53	53	53	53	56	56	56	56	64	72	72	107	107
Drip cap, cover frame	KJ32/Ø	26	26	26	28	28	29	32	33	39	44	47	54	67
Cap	KŽJ13/Ø	85	85	92	97	103	111	124	143	164	184	201	244	308
Formed reduction T1, T2	KŽJ14/Ø, KŽJ22Ø	reduction prices on pages 27 and 28												
Segment reduction S1, S2	KŽJ24/Ø, KŽJ23/Ø													
Wall mounted clamping ring with a pin	KJ19/Ø	18	18	18	18	18	18	18	32	37	42	–	–	–
Reinforced clamping ring with a pin	KDI25/Ø	45	–	–	53	–	–	64	64	64	64	64	108	108
Telescope	KŽJ30/Ø	130	136	143	150	155	161	182	183	218	262	299	333	413

Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.



CHIMNEY SYSTEMS FOR SOLID FUEL BOILERS

Single-wall **KOMIN-MAX ŽARO OWAL** chimney liner systems made of heat-resistant steel sheet are designed for exhaust gases from appliances burning wood and eco-friendly solid fuels. KOMIN-MAX ŽARO OWAL chimney liner systems are used with ceramic chimney flues in new buildings, as well as for repairing old chimneys. The individual elements of the heat-resistant chimney liner are connected to form a chimney assembly using specially designed socket-shaped ends, allowing for free thermal expansion of the liner. The system is available in round or oval versions.

SYSTEM CHARACTERISTICS	
SYSTEM PROPERTIES	KOMIN – MAX ŽARO OWAL
Intended use	Heating devices with an open combustion chamber
Fuel types	gas, fuel oil, wood, eco-friendly solid fuels, coal*
Diameter range	100/140-200/250 mm
Corrosion resistance	Vm
Max. operating temperature	600
Material (exhaust pipe)	1,4828
Core material thickness	0,6 mm; 0,8mm; 1,00 mm
Type of operation	underpressure
Resistant to soot fire	G
Approvals/certificates	CE 1450 – CPR – 0010
Warranty	2 years

*in process of certification/depending on version





Heat-resistant oval chimney systems (page 24 in catalogue)

COMPONENTS	INDEX	[conversion to Ø]					
		SIZE (available in various sizes)					
		[160] 100/200	[180] 100/220	[180] 120/200	[180] 120/220	[200] 120/240	[210] 140/250
Pipe 1000 [mm]	KOŽ01/rozmiar	262	279	300	308	319	355
Pipe 500 [mm]	KOŽ02/rozmiar	144	152	164	171	176	193
Pipe 330 [mm]	KOŽ05/rozmiar	125	130	138	148	152	155
Pipe 250 [mm]	KOŽ03/rozmiar	84	90	95	100	104	114
45° T-connection, long side	KOŽ14/rozmiar	343	369	399	413	427	479
45° T-connection, short side	KOŽ20/rozmiar	448	476	510	524	539	596
87° T-connection, long side	KOŽ04/rozmiar	252	272	294	304	315	353
87° T-connection, short side	KOŽ21/rozmiar	344	366	389	402	414	457
45° elbow, short side	KOŽ07/rozmiar	217	226	232	235	238	259
45° elbow, long side	KOŽ08/rozmiar	207	213	222	226	227	245
90° elbow, short side	KOŽ09/rozmiar	249	257	267	272	278	309
90° elbow, long side	KOŽ10/rozmiar	237	246	259	262	264	294
Cleaning hole with a round stopper, long side	KOŽ06/rozmiar	345	351	358	361	363	400
Cleaning hole with a round stopper, short side	KOŽ22/rozmiar	446	452	459	462	468	506
Cleaning hole with the door 140x140, long side	KOŽ17/rozmiar	477	485	494	498	503	550
Cleaning hole with the door 140x140, short side	KOŽ23/rozmiar	630	639	647	652	657	708
Cleaning hole with the door 140x210, long side	KOŽ18/rozmiar	493	499	508	514	518	563
Cleaning hole with the door 140x210, short side	KOŽ24/rozmiar	646	655	663	669	673	725
Condensate collector	KOŽ11/rozmiar	135	145	152	155	156	172
Condensate collector with a side outlet, long side	KOŽ15/rozmiar	177	188	197	199	204	224
Condensate collector with a side outlet, short side	KOŽ25/rozmiar	196	207	217	219	223	248
Oval reduction, heat-resistant, no plate Ø150	KOŽ16/rozmiar/Ø	179	179	179	184	226	226
Oval reduction, heat-resistant, no plate Ø180	KOŽ16/rozmiar/Ø	184	184	184	184	226	226
Oval reduction, heat-resistant, no plate Ø200	KOŽ16/rozmiar/Ø	226	226	226	226	226	226
Reduction For Cowl Ø150 With Plate	KOŽ26/rozmiar/Ø	243	243	243	246	246	305
Reduction For Cowl Ø160 With Plate	KOŽ26/rozmiar/Ø	246	246	246	246	246	305
Reduction For Cowl Ø180 With Plate	KOŽ26/rozmiar/Ø	246	246	246	246	246	305
Reduction For Cowl Ø200 With Plate	KOŽ26/rozmiar/Ø	293	293	293	293	293	305
Chimney plate	KOŽ13/rozmiar	179	195	208	217	224	248
Pass-through chimney plate	KO21 / rozmiar	105	111	116	120	128	132
Drip cap/cover frame	KO22 / rozmiar	88	95	99	103	109	114
"Umbrella" cap	KOŽ12/rozmiar	145	151	155	156	158	180

Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

KOMIN-MAX DUO ŽARO double-wall chimney systems with an internal casing made of heat-resistant sheet metal are designed as freestanding chimneys for discharging exhaust gases from appliances burning wood, gas, heating oil, and ecological solid fuels.


The system consists of:

- an internal pipe discharging exhaust gases
- mineral wool insulation
- an outer casing.

The thermal insulation is made of non-flammable mineral wool, resistant to continuous high temperatures, preventing the chimney from cooling down, significantly improving its performance.

CHARAKTERYSTYKA SYSTEMU		
SYSTEM PROPERTIES	KOMIN – MAX DUO ŽARO	
Intended use	Heating devices with an open combustion chamber	
Fuel types	gas, fuel oil, wood, eco-friendly solid fuels, coal*	
Diameter range	130/200-500/640 mm; other diameters available on request	
Corrosion resistance	Vm	
Max. operating temperature	600	
Core material	internal: 1,4828, external: 1,4301; 1,4509	
Core material thickness	internal: 0,8 mm external: 0,8 lub 1,00 mm	internal: 1,00 mm external: 0,6 lub 0,8 mm
Insulation	mineral wool	
Insulation thickness	70 mm	
Type of operation	underpressure	
Resistant to soot fire	G	
Approvals/certificates	CE 1450 – CPR – 0010	
Warranty	2 years	

*in process of certification/depending on version

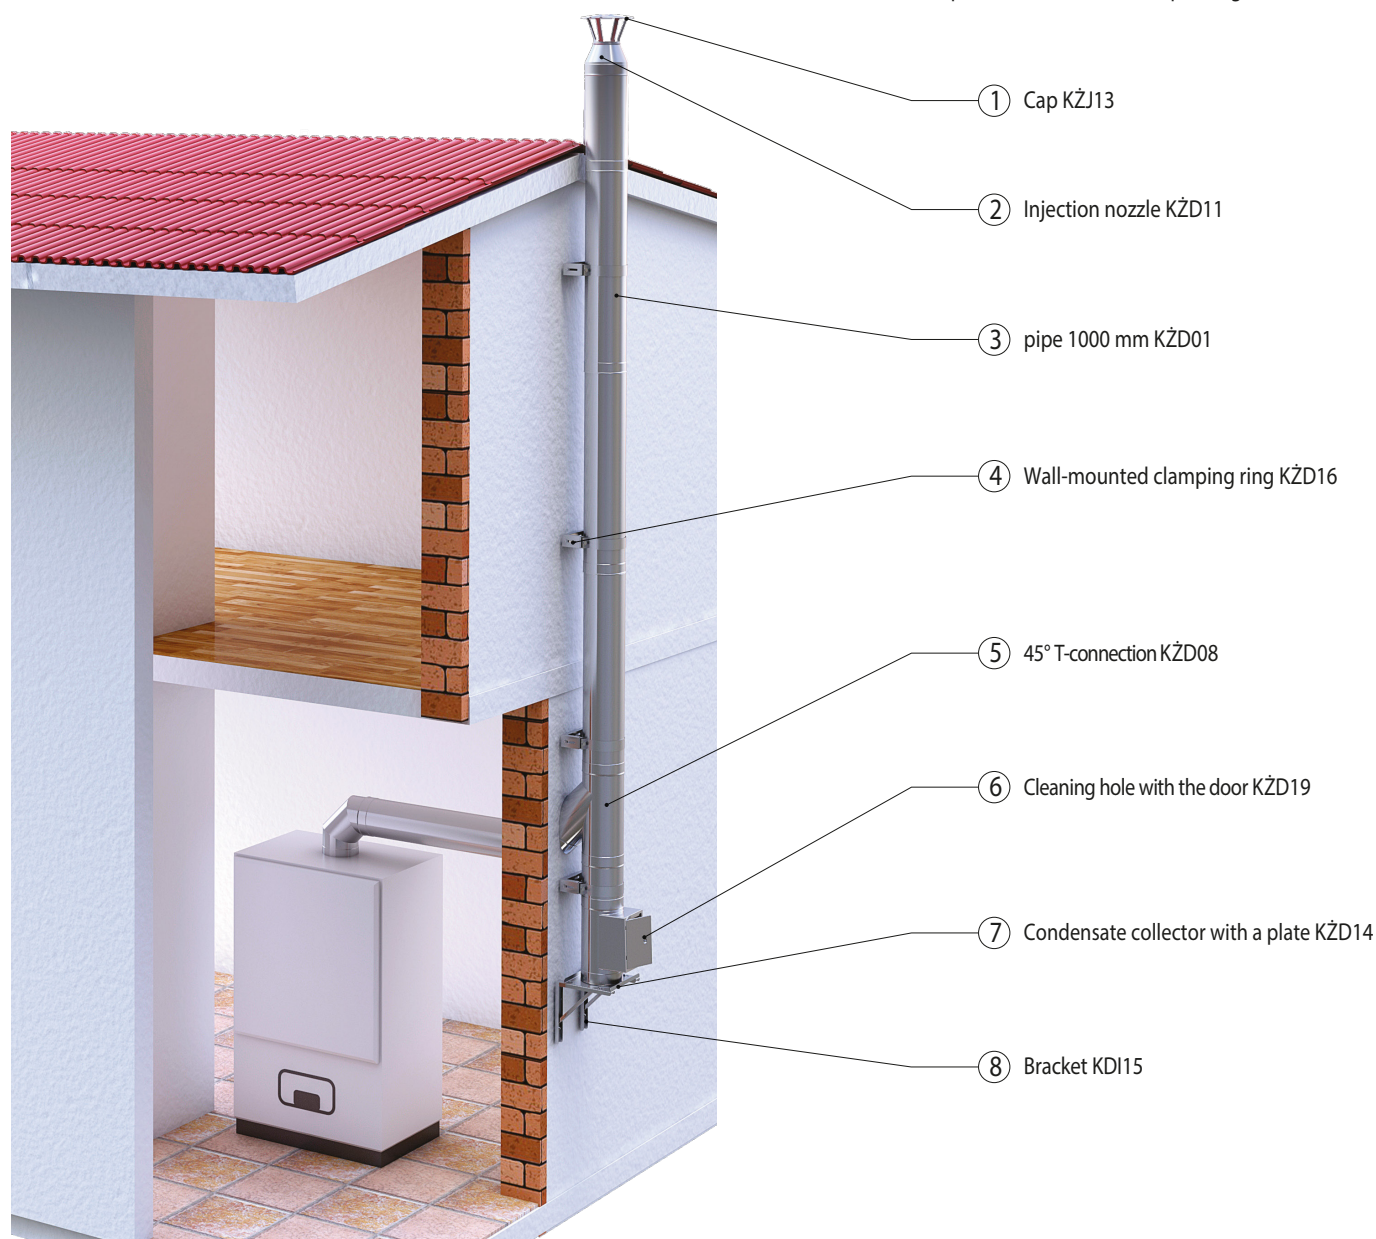



1 mm



underpressure



gas
and oil
boilers



wood-fired
boilers



environmentally
friendly solid
fuel boilers



coal-fired
boilers

Heat-resistant double-walled insulated chimneys (page 32 in catalogue)

COMPONENTS	INDEX	DIAMETER [mm]						
		130/290	150/290	160/300	180/320	200/340	250/390	300/440
Pipe 1000 [mm]	KŽD01/Ø	473	502	522	600	773	952	1066
Pipe 500 [mm]	KŽD02/Ø	283	313	326	365	470	579	648
Pipe 250 [mm]	KŽD03/Ø	212	220	233	261	336	414	464
45° T-connection	KŽD08/Ø	683	757	787	882	1135	1398	1565
87° T-connection	KŽD09/Ø	530	588	611	685	881	1086	1216
15° elbow	KŽD04/Ø	403	447	465	521	670	826	925
30° elbow	KŽD05/Ø	403	447	465	521	670	826	925
45° elbow	KŽD06/Ø	403	447	465	521	670	826	926
90° elbow	KŽD07/Ø	476	528	549	615	792	975	1092
Cleaning hole	KŽD10/Ø	635	704	732	820	1055	1300	1456
Cleaning hole with the door 140x140	KŽD19/Ø	829	919	955	1070	1377	1697	1900
Cleaning hole with the door 140x210	KŽD20/Ø	843	935	972	1089	1401	1726	1933
Condensate collector	KŽD24/Ø	277	310	322	336	398	490	549
Condensate collector with a base	KŽD13/Ø	333	370	384	431	554	683	765
Condensate collector with a plate	KŽD14/Ø	286	317	329	369	475	585	655
Insulated chimney plate	KŽD23/Ø	286	317	329	369	475	585	655
Insulated cap	KŽD21/Ø	222	246	288	309	398	490	549
Injection nozzle	KŽD11/Ø	222	246	256	287	369	455	510
Injection nozzle	KŽD30/Ø	238	277	277	359	359	359	387
Roof adapter (0°-30°)	KDI31/Ø/0-30	232	232	246	272	304	381	468
Roof adapter (10°-40°)	KDI31/Ø/10-40	232	232	246	272	304	381	468
Roof adapter (20°-50°)	KDI31/Ø/20-50	232	232	246	272	304	381	468
Roof adapter (30°-60°)	KDI31/Ø/30-60	232	232	246	272	304	381	468
Reducer insulated	KŽD22/Ø	446	498	498	551	679	679	679
Reinforcing clamping ring	KDI18/Ø	72	72	91	91	98	110	119
Adjustable clamping ring 50-100	KŽD16/Ø/100	231	231	231	296	296	341	396
Adjustable clamping ring 100-200	KŽD16/Ø/200	277	277	277	356	356	409	475
Adjustable clamping ring 250-350	KŽD16/Ø/350	298	298	298	380	380	437	508
Adjustable clamping ring 400-500	KŽD16/Ø/500	424	424	424	543	543	626	726
Wall mounted clamping ring with a pin	KDI25/Ø	108	108	108	108	108	108	108
Clamping ring for the exhauster	KDI26/Ø	109	109	109	109	109	109	129
Bracket - adjustment 50-100 (2 pcs)	KDI15/Ø/100	287	287	372	372	372	451	451
Bracket - adjustment 100-200 (2 pcs)	KDI15/Ø/200	314	314	409	409	409	495	495
Bracket - adjustment 250-350 (2 pcs)	KDI15/Ø/350	377	377	492	492	492	595	595
Bracket - adjustment 400-500 (2 pcs)	KDI15/Ø/500	528	528	690	690	690	832	832
Drip cap/cover frame	KJ32/Ø	67	67	67	77	78	99	109

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

INVEST heat-resistant double-walled chimneys (page 32 in catalogue)

COMPONENTS	INDEX	DIAMETER [mm]							
		100/160	120/180	130/200	140/200	150/220	160/220	180/250	200/260
Pipe 1000 [mm]	KŽD01/Ø	356	356	412	424	456	475	546	600
Pipe 500 [mm]	KŽD02/Ø	222	222	257	265	285	296	332	365
Pipe 330 [mm]	KŽD26/Ø	175	191	218	225	225	240	270	287
Pipe 250 [mm]	KŽD03/Ø	151	166	190	201	201	212	237	261
45° T-connection	KŽD08/Ø	537	537	621	640	688	716	801	882
87° T-connection	KŽD09/Ø	417	417	482	497	534	556	622	685
15° elbow	KŽD04/Ø	317	317	367	378	406	423	473	521
30° elbow	KŽD05/Ø	317	317	367	378	406	423	473	521
45° elbow	KŽD06/Ø	317	317	367	378	406	423	473	521
90° elbow	KŽD07/Ø	375	375	433	446	480	499	559	615
Cleaning hole	KŽD10/Ø	499	499	577	595	640	666	745	820
Cleaning hole with the door 140x140	KŽD19/Ø	652	652	753	777	835	869	973	1070
Cleaning hole with the door 140x210	KŽD20/Ø	663	663	766	790	850	884	990	1089
Condensate collector	KŽD24/Ø	218	218	252	270	283	293	328	309
Condensate collector with a base	KŽD13/Ø	262	262	303	312	336	349	391	431
Condensate collector with a plate	KŽD14/Ø	246	246	260	268	288	300	335	369
Insulated chimney plate	KŽD23/Ø	225	225	260	268	288	300	335	369
Insulated cap	KŽD21/Ø	175	175	202	208	224	251	281	309
Injection nozzle	KŽD11/Ø	175	175	202	208	224	233	261	287
Injection nozzle for chimney cowl	KŽD30/Ø	187	187	217	223	240	240	261	287
Bracket - adjustment 50-100 (2 pcs)	KDI15/Ø/100	176	176	220	220	287	287	287	287
Bracket - adjustment 100-200 (2 pcs)	KDI15/Ø/200	194	194	241	241	314	314	314	314
Bracket - adjustment 250-350 (2 pcs)	KDI15/Ø/350	234	234	290	290	377	377	377	377
Bracket - adjustment 400-500 (2 pcs)	KDI15/Ø/500	327	327	405	405	528	528	528	528
Adapter Support	KDI16/Ø	182	182	227	231	312	243	311	340
Roof adapter (0°-30°)	KDI31/Ø/0-30	145	145	183	193	193	211	229	232
Roof adapter (10°-40°)	KDI31/Ø/10-40	145	145	183	193	193	211	229	232
Roof adapter (20°-50°)	KDI31/Ø/20-50	145	145	183	193	193	211	229	232
Roof adapter (30°-60°)	KDI31/Ø/30-60	145	145	183	193	193	211	229	232
Reinforcing clamping ring	KDI18/Ø	42	42	58	58	64	64	72	78
Adjustable clamping ring 50-100	KDI19/Ø/100	129	129	165	165	176	176	187	198
Adjustable clamping ring 100-200	KDI19/Ø/200	154	154	198	198	211	211	223	238
Adjustable clamping ring 250-350	KDI19/Ø/350	164	164	212	212	226	226	240	254
Adjustable clamping ring 400-500	KDI19/Ø/500	235	235	303	303	323	323	341	363
Reinforced clamping ring with a pin	KDI25/Ø	64	64	64	64	64	64	64	64
Clamping ring for the exhaustor	KDI26/Ø	94	94	94	101	109	109	109	109
Drip cap/cover frame	KJ32/Ø	36	36	48	48	53	53	59	74

Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

CHIMNEY SYSTEMS FOR SOLID FUEL BOILERS



COMPONENTS	INDEX	DIAMETER [mm]							
		200/300	220/300	250/350	300/400	350/450	400/500	450/550	500/600
Pipe 1000 [mm]	KŽD01/Ø	703	773	865	969	1115	1282	1474	1695
Pipe 500 [mm]	KŽD02/Ø	427	470	526	589	677	779	896	1030
Pipe 330 [mm]	KŽD26/Ø	336	369	414	463	533	613	705	1052
Pipe 250 [mm]	KŽD03/Ø	306	336	376	422	485	558	641	737
45° T-connection	KŽD08/Ø	1031	1135	1271	1423	1637	1882	2164	2489
87° T-connection	KŽD09/Ø	801	881	987	1105	1271	1462	1681	1933
15° elbow	KŽD04/Ø	609	670	751	841	967	1112	1279	1470
30° elbow	KŽD05/Ø	609	670	751	841	967	1112	1279	1470
45° elbow	KŽD06/Ø	609	670	751	841	967	1112	1279	1470
90° elbow	KŽD07/Ø	720	792	887	993	1142	1313	1510	1737
Cleaning hole	KŽD10/Ø	959	1055	1182	1324	1522	1751	2013	2315
Cleaning hole with the door 140x140	KŽD19/Ø	1252	1377	1543	1728	1987	2285	2627	3022
Cleaning hole with the door 140x210	KŽD20/Ø	1274	1401	1569	1757	2021	2324	2673	3074
Condensate caollector	KŽD24/Ø	362	398	445	499	574	660	759	870
Condensate collector with a base	KŽD13/Ø	504	554	621	695	760	970	1116	1339
Condensate collector with a plate	KŽD14/Ø	432	475	532	596	778	895	1047	1247
Insulated chimney plate	KŽD23/Ø	432	475	532	596	685	788	906	1042
Insulated cap	KŽD21/Ø	362	398	446	499	574	660	759	878
Injection nozzle	KŽD11/Ø	336	369	414	463	533	613	705	810
Injection nozzle for chimney cowl	KŽD30/Ø	336	369	414	463	533	613	705	810
Bracket - adjustment 50-100 (2 pcs)	KDI15/Ø/100	372	372	372	451	451	505	505	550
Bracket - adjustment 100-200 (2 pcs)	KDI15/Ø/200	409	409	409	495	495	557	557	604
Bracket - adjustment 250-350 (2 pcs)	KDI15/Ø/350	492	492	492	595	595	668	668	725
Bracket - adjustment 400-500 (2 pcs)	KDI15/Ø/500	690	690	690	832	832	935	935	1013
Adapter Support	KDI16/Ø	362	362	362	487	615	716	979	1168
Roof adapter (0°-30°)	KDI31/Ø/0-30	246	246	246	349	384	421	458	475
Roof adapter (10°-40°)	KDI31/Ø/10-40	246	246	246	349	384	421	458	475
Roof adapter (20°-50°)	KDI31/Ø/20-50	246	246	256	349	384	421	458	475
Roof adapter (30°-60°)	KDI31/Ø/30-60	246	246	246	349	384	421	458	475
Reinforcing clamping ring	KDI18/Ø	91	91	91	110	119	128	139	156
Adjustable clamping ring 50-100	KDI19/Ø/100	231	231	231	341	396	461	505	570
Adjustable clamping ring 100-200	KDI19/Ø/200	277	277	277	409	475	553	607	686
Adjustable clamping ring 250-350	KDI19/Ø/350	298	298	298	437	508	591	649	732
Adjustable clamping ring 400-500	KDI19/Ø/500	424	424	424	626	726	845	926	1045
Reinforced clamping ring with a pin	KDI25/Ø	64	64	64	108	108	127	127	127
Clamping ring for the exhauster	KDI26/Ø	109	109	109	109	129	129	129	129
Drip cap/cover frame	KJ32/Ø	74	74	90	101	127	140	155	169

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.



Metal connection systems made of black sheet metal are manufactured from DC01 steel sheets. They are used as connections for exhausting flue gases from fireplaces and all solid fuel heating devices.

These systems are applicable wherever combustion (wood and ecological solid fuels) does not produce condensate.

The components are painted with the highest quality heat-resistant paint.

SYSTEM CHARACTERISTICS	
SYSTEM PROPERTIES	SPOK
Intended use	Connecting elements
Fuel types	wood, eco-friendly solid fuels
Core diameter range	100-300 mm
Corrosion resistance	Vm
Max. operating temperature	600
Core material	DC01
Core material thickness	1,00; 1,2; 1,5; 1,8; 2,0 mm
Element connections	50 mm socket joints
Condensate resistance class	D
Type of operation	underpressure
Resistant to soot fires	G
Approvals/certifications	CE 1450 – CPR – 0010
Warranty	2 years

Black round chimney connections (page 74 in catalogue)

COMPONENTS	INDEX	DIAMETER [mm]							
		120	130	150	160	180	200	220*	250*
Pipe 1000 [mm]	BERTR03/Ø	114	120	144	144	157	175	194	210
Pipe 500 [mm]	BERTR02/Ø	78	79	88	89	101	110	130	142
Pipe 250 [mm]	BERTR01/Ø	57	60	62	66	72	84	96	104
Radiator [0,5 mb]	BERTR14/Ø	150	155	165	170	183	210	235	253
45° T-connection	BERTR11/Ø	190	195	200	200	210	220	280	330
90° T-connection	BERTR12/Ø	170	170	175	182	190	200	260	320
Kolano stałe 45°	BERTR04/Ø	85	90	90	92	94	99	104	106
Kolano nastawne 45°	BERTR26/Ø	78	83	83	85	86	95	116	130
Fixed 45° elbow with a cleanout	BERTR50/Ø	90	92	95	101	108	114	125	138
90° adjustable elbow with cleanout - 3 segments	BERTR05/Ø	116	117	121	127	131	138	182	200
90° elbow - 3 segments	BERTR25/Ø	93	99	101	104	106	112	123	131
90° elbow - 3 segments with cleanout	BERTR49/Ø	105	108	110	115	120	125	150	170
General purpose elbow with cleanout - 4 segments	BERTR33/Ø	152	153	161	162	174	189		
Single wall insert	BERTR07/Ø	25	26	28	29	34	39	41	44
Double wall insert	BERTR08/Ø	41	43	44	47	50	55	61	64
Damper with long handle	BERTR69/Ø	100	100	105	110	115	120	140	160
Damper with short handle	BERTR09/Ø	92	94	98	101	108	115	130	150
Rosette	BERTR13/Ø	16	17	19	20	22	24	28	32
Adapter for ceramics	BERTR34/Ø	105	105	105	105	105	105	125	140
Adapter for ceramics with reduction	BERTR35/Ø	105	105	110	110	116	116	135	155
Square reducer	BERTR43/Ø	-	-	160	-	160	160	-	-
Nipple	BERTR36/Ø	57	60	62	66	72	84	96	104
Coupler	BERTR37/Ø	45	47	48	53	55	61	64	69
Formed reduction T1, T2	BERTR39/Ø, BERTR41/Ø	* Ceny redukcji na stronie 27 i 28							
Segment reduction S1, S2	BERTR40/Ø, BERTR42/Ø								

Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

Metal connection systems made of black, cold-rolled sheet metal are manufactured from DC01 steel sheets. They are used as connections for the removal of exhaust gases from solid fuel heating devices such as pellet stoves.

All components of the system have grooves for a silicone seal.



SYSTEM CHARACTERISTICS

SYSTEM PROPERTIES	SPNP
Intended use	Connection elements for pellet stoves
Fuel types	pelet
Core diameter range	80; 100 mm
Corrosion resistance	Vm
Max. operating temperature	200
Core material	DC01
Core material thickness	1,00; 1,2; 1,5 mm
Element connections	D
Type of operation	underpressure
Odporny na pożar sadzy	O
Approvals/certifications	CE 1450 – CPR – 0010
Warranty	2 years

Chimney connections for pellet-fired appliances (page 92 in catalogue)

COMPONENTS	INDEX	DIAMETER [mm]	
		80	*100
Pipe 1000 [mm]	SPNP01/Ø	86	upon request
Pipe 500 [mm]	SPNP02/Ø	63	upon request
Pipe 250 [mm]	SPNP03/Ø	54	upon request
Telescopic pipe	SPNP04/Ø	217	upon request
90° elbow	SPNP05/Ø	100	upon request
45° elbow	SPNP06/Ø	83	upon request
90° elbow with cleanout	SPNP07/Ø	176	upon request
90° t-connection	SPNP08/Ø	131	upon request
90° t-connection with cleanout	SPNP09/Ø	202	upon request
Cap/stopper	SPNP10/Ø	70	upon request
Condensate collector	SPNP11/Ø	86	upon request
Stopper	SPNP12/Ø	84	upon request
Silicone rosette C	SPNP16/Ø	25	upon request
Rosette A	SPNP14/Ø	63	upon request
Rosette B	SPNP15/Ø	18	upon request
Reducer	SPNP13/Ø	61	upon request
Connector (+)	SPNP17/Ø	74	upon request
Connector (-)	SPNP18/Ø	26	upon request
Cap	SPNP19/Ø	91	upon request
Vent chimney	SPNP20/Ø	62	upon request
Liner for ceramics	SPNP21/Ø	176	upon request
Clamping ring	SPNP22/Ø	58	upon request

*ask your sales representative about availability

Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

ACCESSORIES FOR CERAMIC CHIMNEYS


Chimney cap

Recommended element to cover the end of a ceramic chimney



Upper ventilation grille

Used for ventilating the chimney shaft; various sizes available.

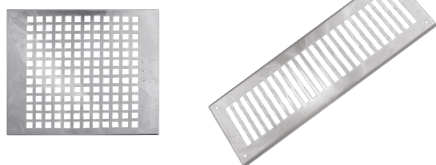


Acid-resistant insulated cleaning hole door

Closes the cleaning hole with a fire barrier; with/without handles; painted/unpainted; various sizes.



Lower ventilation grille

Used for ventilating the chimney shaft and inserting the condenser pipe; various sizes.



Chimney cone

Element covering the end of a ceramic chimney with a plate for hollow bricks with pipe holders.



Permanent formwork

Protects against precipitation the space between the chimney and the chimney liner and allows installation of a cowl.



Spacer/centering clamping ring

Used to stabilize the ceramic liner in the chimney flue



COMPONENTS	INDEX	DIAMETER
CERAMIC CHIMNEY CONE ACID – type A, B, C, D, E	STKOM/typ	Products made to individual order
centering clamping ring	KC01/Ø	
permanent formwork uniwersalny galvanized	KC02/Ø	
permanent formwork uniwersalny acid	KC03/Ø	
cleaning hole door for ceramic chimneys	KC04	
Upper ventilation grille 140x140	KC05/140/140	
Lower ventilation grille 140x140	KC06/140/140	

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

ACID-RESISTANT REDUCERS (thickness 0.6 mm) – expansion max 2 cm

DIAMETER		+ Ø															
		80	100	110	120	125	130	140	150	160	180	200	220	250	300	350	400
- Ø	80	28	30	55	58	58	58	70	81	91	94	116	131	144	156	158	164
	100	30	28	28	34	58	58	70	81	91	94	116	131	144	156	158	164
	110	55	28	28	32	32	34	70	81	91	94	116	131	144	156	158	164
	120	58	34	32	29	32	32	42	81	91	94	116	131	144	156	158	164
	125	58	58	32	32	29	32	38	81	91	94	116	131	144	156	158	164
	130	58	58	34	32	32	29	38	49	91	94	116	131	144	156	158	164
	140	70	70	70	42	38	38	34	44	55	94	116	131	144	156	158	164
	150	80	81	81	81	81	49	44	40	50	94	116	131	144	156	158	164
	160	91	91	91	91	91	91	55	50	46	51	116	131	144	156	158	164
	180	94	94	94	94	94	94	94	94	51	48	65	131	144	156	158	164
	200	116	116	116	116	116	116	116	116	116	65	58	71	144	156	158	164
	220	131	131	131	131	131	131	131	131	131	131	71	65	144	156	158	164
	250	144	144	144	144	144	144	144	144	144	144	144	144	73	156	158	164
	300	156	156	156	156	156	156	156	156	156	156	156	156	156	78	158	164
	350	158	158	158	158	158	158	158	158	158	158	158	158	158	158	92	164
	400	162	164	164	164	164	164	164	164	164	164	164	164	164	164	164	110

HEAT-RESISTANT REDUCERS (thickness 1 mm) – expansion max 2 cm

DIAMETER		+ Ø															
		80	100	110	120	125	130	140	150	160	180	200	220	250	300	350	400
- Ø	80	33	36	67	72	72	72	86	97	111	116	141	175	206	249	267	310
	100	36	33	33	40	72	72	86	97	111	116	141	175	206	249	267	310
	110	67	33	33	40	40	40	86	97	111	116	141	175	206	249	267	310
	120	72	40	40	36	36	40	47	97	111	116	141	175	206	249	267	310
	125	72	72	40	36	36	36	47	97	111	116	141	175	206	249	267	310
	130	72	72	40	40	36	36	47	54	111	116	141	175	206	249	267	310
	140	86	86	86	47	47	47	43	54	61	116	141	175	206	249	267	310
	150	97	97	97	97	97	54	54	48	61	116	141	175	206	249	267	310
	160	111	111	111	111	111	111	61	61	55	64	141	175	206	249	267	310
	180	116	116	116	116	116	116	116	116	64	58	77	175	206	249	267	310
	200	141	141	141	141	141	141	141	141	141	77	70	88	206	249	267	310
	220	175	175	175	175	175	175	175	175	175	175	88	88	206	249	267	310
	250	206	206	206	206	206	206	206	206	206	206	206	206	103	249	267	310
	300	249	249	249	249	249	249	249	249	249	249	249	249	249	124	267	310
	350	267	267	267	267	267	267	267	267	267	267	267	267	267	267	133	310
	400	310	310	310	310	310	310	310	310	310	310	310	310	310	310	310	155



segment reducers



formed reduction

Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

REDUCERS GALVANIZED (thickness 0.5 mm) – expansion max 1 cm

DIAMETER		+ Ø															
		80	100	110	120	125	130	140	150	160	180	200	220	250	300	350	400
Ø -	80	29	44	48	50	50	60	61	64	71	80	92	102	119	139	168	193
	100	43	29	31	50	50	60	61	64	71	80	92	102	119	139	168	193
	110	48	32	31	33	50	60	61	64	71	80	92	102	119	139	168	193
	120	50	50	34	33	34	38	61	64	71	80	92	102	119	139	168	193
	125	50	50	50	33	34	38	61	64	71	80	92	102	119	139	168	193
	130	60	59	60	38	38	38	41	100	71	80	92	102	119	139	168	193
	140	61	61	61	61	61	41	41	42	71	80	92	102	119	139	168	193
	150	64	63	64	63	64	64	42	42	48	80	92	102	119	139	168	193
	160	71	71	71	71	71	71	71	48	48	80	92	102	119	139	168	193
	180	80	81	80	81	80	80	80	80	80	53	92	102	119	139	168	193
	200	92	92	92	92	92	92	92	92	92	92	61	102	119	139	168	193
	220	102	102	102	102	102	102	102	102	102	102	102	68	119	139	168	193
	250	119	119	119	119	119	119	119	119	119	119	119	119	78	139	168	193
	300	139	139	139	139	139	139	139	139	139	139	139	139	139	92	168	193
	350	168	168	168	168	168	168	168	168	168	168	168	168	168	168	110	193
	400	193	193	193	193	193	193	193	193	193	193	193	193	193	193	193	128

REDUCERS BLACK (thickness 0.5 mm)
expansion max 3 cm


DIAMETER		+ Ø								
		120	130	140	150	160	180	200	220	250
Ø -	120	83	83	83	83	130	130	130	144	144
	130	83	83	83	83	83	130	130	144	144
	140	83	83	83	83	83	130	130	144	144
	150	83	83	83	83	83	83	130	144	144
	160	130	83	83	83	83	83	130	144	144
	180	130	130	130	83	83	83	83	144	144
	200	130	130	130	130	130		83	144	144
	220	144	144	144	144	144	144	97	97	144
	250	144	144	144	144	144	144	144	144	97

ACID-RESISTANT REDUCERS MATT (thickness 1 mm)
expansion max 2 cm

DIAMETER		+ Ø			
		150	160	180	200
Ø -	150	63	79	146	178
	160	79	70	83	178
	180	146	83	74	101
	200	178	178	101	90


REDUCERS EXAMPLES:

acid-resistant formed



formed reduction

heat-resistant segment





segment reduction

galvanized segment



segment reduction black

segment
reducersformed
reduction

Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

COMPONENTS	Product version	INDEX	DIAMETER [mm]							
			80	100	110	120	125	130	140	150
VENTILATION CAPS										
Rotary (page 144 in catalogue)										
Rotational cowl with a base	aluminum	KJ39/Ø								272
Longitudinal rotational cowl with a base	aluminum	KJ40/Ø								296
Rotational cowl without a base	aluminum	KJ61Ø								233
Longitudinal rotational cowl without a base	aluminum	KJ60Ø								257
Rotational cowl with flange without a base	aluminum	KJF61Ø								
Rotational cowl with flange without a base	acid-resistant	KJF51Ø								
Rotational cowl without a base	acid-resistant	KJ54/Ø								322
Longitudinal rotational cowl with a base	acid-resistant	KJ50/Ø								340
Rotational cowl without a base	acid-resistant	KJ51/Ø								290
Longitudinal rotational cowl without a base	acid-resistant	KJ52/Ø								310
Longitudinal rotational cowl for ceramics	aluminum	KJ56/Ø								367
Longitudinal rotational cowl for ceramics	acid-resistant	KJ57/Ø								382
Chimney cowl	acid-resistant	KJ30/Ø	144	144	144	153	153	172	172	182
Chimney cowl with a rooster	acid-resistant	KJ64	144	144	144	153	153	172	172	182
Rotational cowl with external bearing and a base	acid-resistant	KJZŁ54/Ø								481
Rotational cowl with external bearing without a base	acid-resistant	KJZŁ51/Ø								468
FIXED (page 148 in catalogue)										
Szenard ACID*	acid-resistant	KJ53/Ø	200	200	200	240	240	275	275	299
Szenard GALVANIZED*	galvanized	DPO26/Ø	167	167	167	200	200	233	233	255
Szenard with a plate ACID*	acid-resistant	KJ69	295	295	295	332	332	367	367	392
Szenard with a plate GALVANIZED*	galvanized	DPO79	273	273	273	304	304	339	339	356
Woolper ACID*	acid-resistant	KJ47/Ø	240	240	240	275	275	312	312	339
Woolper GALVANIZED*	galvanized	DPO27/Ø	167	200	200	233	233	262	262	284
Woolper with a plate ACID*	acid-resistant	KJ66	332	332	332	367	367	407	407	429
Woolper with a plate GALVANIZED*	galvanized	DPO84	273	304	304	339	339	367	367	389
“H” cowl with a plate and cleanout ACID*	acid-resistant	KJ71	462	462	491	526	548	554	609	647
“H” cowl with a plate GALVANIZED*	galvanized	DPO82	246	246	246	257	266	275	286	295
Cap „Napoleon”**	acid-resistant	KJ77/Ø								
Cap „Chirńczyk”**	acid-resistant	KJ78/Ø								178
Cap with a plate WDA*	galvanized	DPO46	134	134	143	143	143	145	152	165
* Discount depends on the quantity ordered. Ask your sales representative for details.										
FLAME/SMOKE CAPS (page 146 in catalogue)										
Chimney cowl with external bearing 0,6 mm	acid-resistant	KJZŁ 0,6/Ø								329
Chimney cowl with external bearing 1,0 mm	heat-resistant	KJZŁ 1,0/Ø								378
Chimney cowl with external bearing 2 mm	steel sheet	KJZŁ 2,0/Ø								454
CONES (str. 151 w katalogu)										
Ceramic chimney cone type A	acid-resistant	STKOM/A								
Ceramic chimney cone type B	acid-resistant	STKOM/B								
Ceramic chimney cone type C	acid-resistant	STKOM/C								
Ceramic chimney cone type D	acid-resistant	STKOM/D								
Ceramic chimney cone type E	acid-resistant	STKOM/E								
ADAPTERS AND BASES (page 10 in catalogue)										
Chimney cowl base with a flange	galvanized	KJOF61Ø								
Chimney cowl base with a flange	acid-resistant	KJKF51Ø								
Chimney cowl base 0,6 mm	acid-resistant	KJ31/Ø	52	52	52	52	52	52	58	59
Chimney cowl base 1,0 mm	acid-resistant	KZJ20/Ø								124
Chimney cowl base 2,0 mm	steel sheet	BERTR15/Ø								151
Base galvanized	galvanized	KJ75	50	50	50	50	50	50	53	55
Reduction adapter with a plate 140x140	acid-resistant	KJ67								124
Reduction adapter with a plate 140x140	heat-resistant	KZJ26/Ø								174
Reduction adapter with a plate 140x140	galvanized	DPO70								74
Reduction adapter with a plate 140x270	acid-resistant	KJ68								
Reduction adapter with a plate 140x270	heat-resistant	KZJ27/Ø								
Reduction adapter with a plate 140x270	galvanized	DPO65								
Adapter for ceramics	acid-resistant	KJ72							135	135
Adapter for ceramics	galvanized	DPO73							72	72

Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

COMPONENTS	Product version	INDEX	DIAMETER [mm]									
			160	180	200	220	250	300	350*	400	500	
VENTILATION CAPS												
Rotary (page 144 in catalogue)												
Rotational cowl with a base	aluminum	KJ39/Ø			425		523	902	1468	1579	1791	
Longitudinal rotational cowl with a base	aluminum	KJ40/Ø										
Rotational cowl without a base	aluminum	KJ61Ø			386		487	750	1236	1354	1591	
Longitudinal rotational cowl without a base	aluminum	KJ60Ø										
Rotational cowl with flange without a base	aluminum	KJF61Ø						952	1490	1638	1825	
Rotational cowl with flange without a base	acid-resistant	KJF51Ø						1140	1641	1913	2246	
Rotational cowl without a base	acid-resistant	KJ54/Ø			567		609	1140	1641	1913	2246	
Longitudinal rotational cowl with a base	acid-resistant	KJ50/Ø										
Rotational cowl without a base	acid-resistant	KJ51/Ø			517		560	880	1490	1638	1989	
Longitudinal rotational cowl without a base	acid-resistant	KJ52/Ø										
Longitudinal rotational cowl for ceramics	aluminum	KJ56/Ø										
Longitudinal rotational cowl for ceramics	acid-resistant	KJ57/Ø										
Chimney cowl	acid-resistant	KJ30/Ø	182	191	229	229	267	306	362			
Chimney cowl with a rooster	acid-resistant	KJ64	182	191	229	229	267	306	362			
Rotational cowl with external bearing and a base	acid-resistant	KJZŁ54/Ø			587							
Rotational cowl with external bearing without a base	acid-resistant	KJZŁ51/Ø			575							
FIXED (page 148 in catalogue)												
Szenard ACID*	acid-resistant	KJ53/Ø	299	312	682	772	946	1203	1368			
Szenard GALVANIZED*	galvanized	DPO26/Ø	255	262	572	649	796	1010	1151			
Szenard with a plate ACID*	acid-resistant	KJ69	392	407	887	972	1146	1404	1571			
Szenard with a plate GALVANIZED*	galvanized	DPO79	356	367	801	878	1025	1241	1384			
Woolper ACID*	acid-resistant	KJ47/Ø	339	356	772	860	1034	1368	1538			
Woolper GALVANIZED*	galvanized	DPO27/Ø	284	295	649	719	867	1151	1287			
Woolper with a plate ACID*	acid-resistant	KJ66	429	449	972	1060	1234	1571	1740			
Woolper with a plate GALVANIZED*	galvanized	DPO84	389	403	878	948	1096	1384	1520			
“H” cowl with a plate and cleanout ACID*	acid-resistant	KJ76										
“H” cowl with a plate GALVANIZED*	galvanized	DPO82										
Cap „Napoleon”*	acid-resistant	KJ77/Ø		191	251		304					
Cap „Chińczyk”*	acid-resistant	KJ78/Ø										
Cap with a plate WDA*	galvanized	DPO46	183	198	249							
* Discount depends on the quantity ordered. Ask your sales representative for details.												
FLAME/SMOKE CAPS (page 146 in catalogue)												
Chimney cowl with external bearing 0,6 mm	acid-resistant	KJZŁ 0,6/Ø	338	351	372	389	409	479				
Chimney cowl with external bearing 1,0 mm	heat-resistant	KJZŁ 1,0/Ø	387	403	427	449	501	551	615			
Chimney cowl with external bearing 2 mm	steel sheet	KJZŁ 2,0/Ø		491	526		670					
CONES (str. 151 w katalogu)												
Ceramic chimney cone type A	acid-resistant	STKOM/A										
Ceramic chimney cone type B	acid-resistant	STKOM/B										
Ceramic chimney cone type C	acid-resistant	STKOM/C										
Ceramic chimney cone type D	acid-resistant	STKOM/D										
Ceramic chimney cone type E	acid-resistant	STKOM/E										
ADAPTERS AND BASES (page 10 in catalogue)												
Chimney cowl base with a flange	galvanized	KJOF61Ø						375	477	511	586	
Chimney cowl base with a flange	acid-resistant	KJKF51Ø						519	606	707	952	
Chimney cowl base 0,6 mm	acid-resistant	KJ31/Ø	65	75	83	96	109	125	144			
Chimney cowl base 1,0 mm	acid-resistant	KZJ20/Ø	142	162	172	189	205	215	246			
Chimney cowl base 2,0 mm	steel sheet	BERTR15/Ø		200	212		277					
Base galvanized	galvanized	KJ75	57	68	76	87	101	117	133			
Reduction adapter with a plate 140x140	acid-resistant	KJ67	124									
Reduction adapter with a plate 140x140	heat-resistant	KZJ26/Ø	174									
Reduction adapter with a plate 140x140	galvanized	DPO70	74									
Reduction adapter with a plate 140x270	acid-resistant	KJ68		189	189		189					
Reduction adapter with a plate 140x270	heat-resistant	KZJ27/Ø		264	264		264					
Reduction adapter with a plate 140x270	galvanized	DPO65		123	123		123					
Adapter for ceramics	acid-resistant	KJ72	135	135	135		169					
Adapter for ceramics	galvanized	DPO73	72	72	72		107					

Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

Chimney doors


COMPONENTS	INDEX	PRICE
Door 140X140 heat-resistant acid-resistant	KŽ17/140x140	137
Door 140X210 heat-resistant acid-resistant	KŽ17/140x210	181
Door 140X270 heat-resistant acid-resistant	KŽ17/140x270	224
Door 140X140 heat-resistant white	KŽ22/140x140	102
Door 140X210 heat-resistant white	KŽ22/140x210	109
Door 140X270 heat-resistant white	KŽ22/140x270	124
Door 140 X 140 – polished	KJ23/140x140	76
Door 140 X 210 – polished	KJ23/140x210	109
Door 140 X 270 – polished	KJ23/140x270	133
Door 140 X 140 – white	KJ22/140x140	56
Door 140 x 210 – white	KJ22/140x210	70
Door 140 x 270 – white	KJ22/140x270	83

Expansion vessels

COMPONENTS	INDEX	PRICE
Expansion vessel 15 l complete with valve	NW1	383
Expansion vessel 20 l complete with valve	NW2	450
Expansion vessel 25 l complete with valve	NW3	484
Expansion vessel 30 l complete with valve	NW4	517
Float valve	NW5	72

Cleaning hole door ensure that chimney inspections can be carried out properly and allow the removal of soot that has accumulated there. The requirement to have cleaning door in chimney is stipulated in the applicable legal regulations.

Expansion vessel, also known as a expansion tank, is responsible for minimizing the expansion of water volume. It is an essential component of a properly constructed heating system, as without it, leaks or the activation of a safety valve may occur as a result of increasing pressure. The vessel collects excess water generated by heating, equalizing the pressure in the entire circuit.

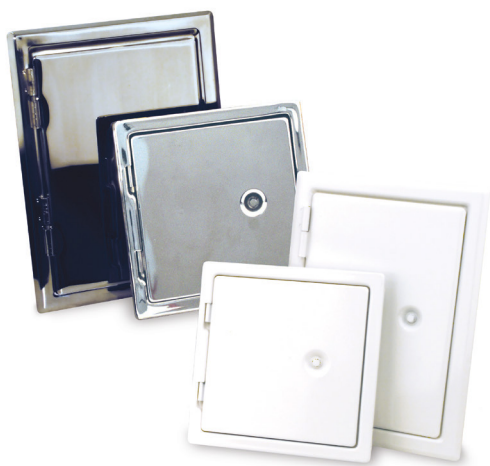


Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

VENTILATION SYSTEMS

The technologies and materials we use allow for the precise manufacture of individual ventilation components. The main material used in production is high-quality galvanized sheet metal with a thickness of 0.5 mm, and in the case of flexible ducts, 0.10–0.12 mm aluminum tape. The range of sizes of the manufactured elements allows for the complete assembly of appropriate systems depending on individual needs.

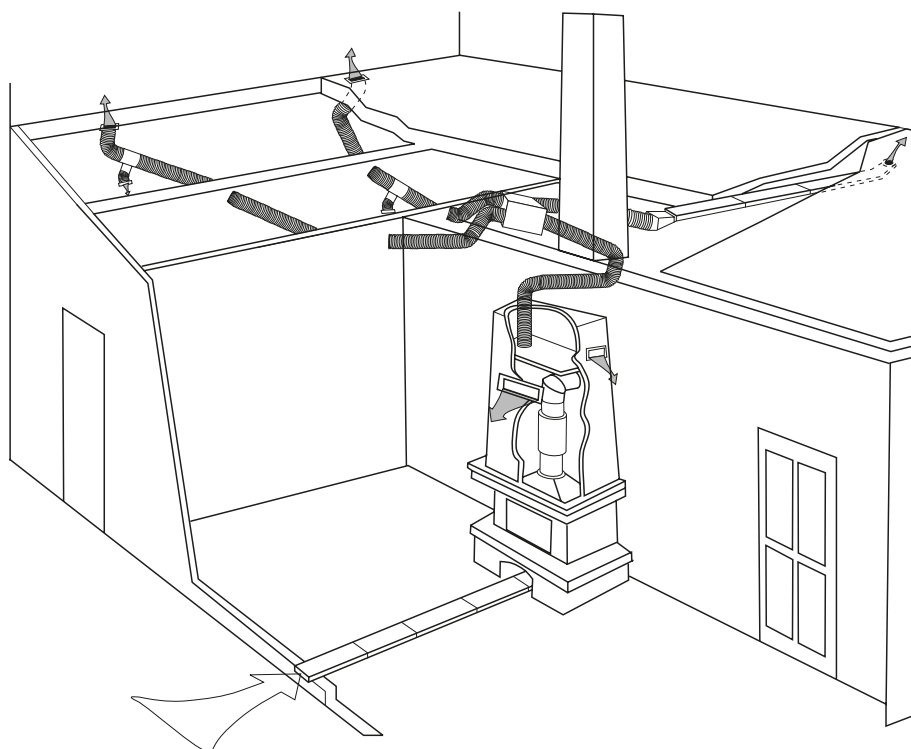

Flex flexible aluminium pipes and accessories (page 104 in catalogue)

COMPONENTS	INDEX	DIAMETER [mm]														
		70	75	80	85	90	95	100	110	115	120	125	130	135	140	150
ALUFLEX aluminum pipe, 3 m	FLEX/Ø	24,20	18,70	20,90	20,90	22,00	24,20	24,20	25,30	28,60	28,60	30,80	31,90	34,10	35,20	35,20
ALUFLEX SMART aluminum pipe, 3 m	FLEX/Ø/S	*	*	*	*	*	*	24,30	25,65	*	28,35	31,05	*	*	*	35,10

COMPONENTS	INDEX	DIAMETER [mm]													
		160	175	180	200	220	225	250	280	300	315	350	400	450	500
ALUFLEX aluminum pipe, 3 m	FLEX/Ø	38,50	44,00	47,30	48,40	56,10	56,10	60,50	68,20	74,80	75,90	85,80	97,90	110,00	126,50

COMPONENTS	INDEX	DIAMETER [mm]																	
		100	110	115	120	125	130	135	140	150	160	180	200	220	230	250	300	315	350
Nipple	DPO18/Ø	7	7	7	7	7	7	7	7	7	12	12	12	12	12	12	17	17	17
Rosette painted white	DPO19/Ø	20	20	20	20	20	20	20	20	20	53	59	59	74	84	85	109	131	147
Rosette polished	DPO20/Ø	32	32	32	32	32	32	32	32	32	72	74	74	91	97	102	120	131	147
Coupler	DPO45/Ø	10	10	10	10	10	10	10	10	10	17	17	17	17	17	24	24	24	24

Flexible aluminium liners (page 107 in catalogue)

COMPONENTS	INDEX	CIRCUMFERENCE [mm] Net price PLN per 1 mb									
		420	480	560	600	720	840	860	900	1200	1500
Aluminium liner ALU-MAX-FOL	AMFW/circum.	111	111	111	111	120	131	144	*	*	*
Aluminium liner ALU-MAX-FOL (S)	AMFS/circum.	121	121	121	121	134	145	157	*	*	*
length of the available circuit [mb]		50	50	50	50	50	50	50			

Items marked in **red** are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

ROUND AIR DISTRIBUTION SYSTEM OF THE GALVANISED STEEL SHEET



COMPONENTS	INDEX	DIAMETER [mm]																		
		100	110	120	125	130	140	150	160	180	200	220	230	250	300	350	400	450	500	
120° Y-connection, trousers	DPO03/Ø	33	39	40	42	44	49	50	62	69	75	91	99	106	115	138	187	235	275	
120° Y-connection, trousers , reduction	DPO04/Ø	50	59	60	63	66	74	75	93	104	113	137	149	159	173	207	281	353	413	
90° Y-connection, trousers	DPO61/Ø	33	39	40	42	44	49	50	62	69	75	91	99	106	115	138	187	235	275	
90° Y-connection, trousers , reduction	DPO62/Ø	50	59	60	63	66	74	75	93	104	113	137	149	159	173	207	281	353	413	
90° T-connection	DPO05/Ø	27	32	33	39	40	42	44	52	59	62	79	83	91	97	118	144	165	188	
45° T-connection	DPO06/Ø	48	61	62	68	75	76	81	96	109	115	142	150	163	176	216	258	297	342	
90° four-terminal network	DPO48/Ø	55	64	70	75	81	84	90	105	119	125	157	168	179	195	237	286	332	379	
Throttling valve with a wire	DPO08/Ø	33	33	33	39	39	40	40	40											
Throttling valve with a string	DPO63/Ø	105	106	107	114	115	116	119	125	147	172									
Throttling valve with a handle	DPO09/Ø	105	106	107	114	115	116	119	125	147	172									
Throttling valve with a string and a gasket	DPO64/Ø	129	132	134	137	140	141	144	147	210	248									
Throttling valve with a handle and a gasket	DPO47/Ø	129	132	134	137	140	141	144	147	210	248									
90° T-connection with a throttling valve	DPO10/Ø	150	150	150	150	150	150	150	150											
Filter box	DPO11/Ø	222	222	222	222	222	222	222	222											
Round duct filter	DPO12/Ø	116			125			132	137											
Round filter insert	DPO13/Ø	27			32			39	40											
Distributor box 4x (block)	DPO14/Ø	87	87	87	87	87	87	87	87											
Distributor box (rocket)	DPO15/Ø	125	125	125	125	125	125	125	125											
Distributor box (christmas tree)	DPO16/Ø	198	198	198	198	198	198	198	198											
Formed reducer	DPO17/Ø	reduction prices on pages 27 and 28																		
Segment reducer	DPO80/Ø																			
Air intake galvanized	DPO21/Ø	70	70		72			75	75											
Air intake white	DPO22/Ø	70	70		72			81	81											
Air intake polished	DPO23/Ø	81	84		100			100	100											
Air intake polished with drip cap	DPO24/Ø							91	121	121			160							
Stopper	DPO25/Ø	9	9	9	9	9	9	9	9											
Intake cassette 170 x 170	DPO28/Ø	16	16	16	16	16	16	16												
Intake cassette 170 x 300	DPO29/Ø	23	23	23	23	23	23	23												
Distributor over chimney	DPO40/Ø	price according to order																		
Bolt	DPO86/Ø	50	52	52	55	56	59	62	69	70	75									
Pipe-intake transition	DPO59/Ø	39	39	39	39	39	39	39												

Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

COMPONENTS	INDEX	DIAMETER [mm]																	
		100	110	120	125	130	140	150	160	180	200	220	230	250	300	350	400	450	500
Pipe 1000 [mm]	DPOK01/Ø	27	29	33	34	43	46	48	54	68	76	87	91	99	126	158	187	216	244
Pipe 500 [mm]	DPOK02/Ø	16	19	21	21	26	29	33	33	43	46	53	57	58	76	96	112	128	149
Pipe 330 [mm]	DPOK56/Ø	15	16	19	19	21	26	27	29	34	37	46	47	50	67	80	96	107	121
Pipe 250 [mm]	DPOK57/Ø	11	15	15	15	16	19	21	26	27	29	37	38	41	50	62	76	89	100
90° T-connection	DPOK05/Ø	29	34	37	43	44	46	48	56	74	68	87	91	99	105	128	158	179	206
45° T-connection	DPOK06/Ø	52	67	68	74	81	82	89	104	65	125	154	164	177	192	236	282	323	374
90° four-terminal network	DPOK48/Ø	61	70	76	81	89	92	98	115	119	137	171	184	195	213	259	312	362	413
90° adjustable elbow	DPOK07/Ø	27	29	33	34	37	43	44	46	54	56	75	82	91	107	119	141	163	184
90° elbow	DPOK58/Ø	18	20	23	29	29	30	30	31	38	40	51	57	64	74	81	96	114	130
Formed reducer T1, T2	DPOK17/Ø/T1, T2	reduction prices on pages 27 and 28																	
Segment reducer S1, S2	DPOK17/Ø/S1, S2																		
Chimney plate	DPOK49/Ø	95	98	105	111	115	125	133	138	149	161	188	206	216	247	280	310		
Cap	DPOK32/Ø	30	31	37	38	46	50	52	58	74	82	94	99	107	138	171			
Wall mounted clamping ring with a pin	KJ19/Ø	18	18	18	18	18	18	18	18	18	33	45	49						
Reinforced clamping ring with a pin	KD125/Ø	50					61			75	75	80	80	80	135	135	135	158	158

Ventilation grille

NAME	SIZE [cm]	INDEX	PRICE net in PLN
Ventilation grille 11x14 color	11x14	KR/color/11x14	44
Ventilation grille 11x14 stainless	11x14	KRN11x14	65
Ventilation grille 14x14 color	14x14	KR/color/14x14	44
Ventilation grille 14x14 stainless	14x14	KRN14x14	65
Ventilation grille 14x21 color	14x21	KR/color/14x21	47
Ventilation grille 14x21 stainless	14x21	KRN14x21	97

Sample order index: KRA/11x14/CB – dark brown grille

Available grille colors: BI – white; CB – dark brown; JB – light brown; C – brick red; G – graphite

Other RAL colors and other grille sizes are available upon request.

Ask your sales representative about details.



Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

RECTANGULAR AIR DISTRIBUTION SYSTEM OF THE GALVANISED STEEL SHEET



COMPONENTS	INDEX	DIAMETER [mm]		
		150/50	200/50	200/90
Kanał prosty 1000 [mm]	DPP01/rozmiar	40	58	60
Kanał prosty 500 [mm]	DPP02/rozmiar	25	32	38
90° Kolano ściana - strop	DPP03/rozmiar	24	30	32
45° Kolano ściana - strop	DPP27/rozmiar	21	26	28
45° Kolano	DPP04/rozmiar	16	23	23
90° Kolano	DPP05/rozmiar	26	34	36
90° Trójkąt	DPP06/rozmiar	22	28	30
45° Trójkąt	DPP07/rozmiar	31	41	46
120° Trójkąt Y	DPP08/rozmiar	25	31	34
90° Trójkąt Y	DPP09/rozmiar	22	28	30
Four-terminal network	DPP10/rozmiar	24	30	31
Air intake galvanised	DPP11/rozmiar	41	54	59
Air intake painted white	DPP12/rozmiar	47	60	61
Air intake polished	DPP13/rozmiar	50	73	80
Throttling valve with a wire	DPP14/rozmiar	22	29	32
Throttling valve with a string	DPP15/rozmiar	75	104	115
Fitting with a round outlet	DPP16/rozmiar	32	43	47
Fitting with a rectangular outlet	DPP17/rozmiar	32	43	47
Nipple	DPP18/rozmiar	5	6	6
Coupler	DPP25/rozmiar	8	10	10
Mounting clamp	DPP19/rozmiar	4	6	7
Symmetrical round reducer	DPP20/rozmiar	39	49	55
Asymmetrical round reducer	DPP21/rozmiar	52	70	72
Symmetrical rectangular reducer	DPP22/rozmiar	40	60	66
Asymmetrical rectangular reducer	DPP23/rozmiar	40	60	66



Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

COMPONENTS	INDEX	DIAMETER [mm]							
		102	127	152	163	203	254	305	315
Insulated duct 10 mb	DPO38/Ø	145	161	170	232	238	300	368	436
Insulated duct 5 mb	DPO39/Ø	80	89	95	131	139	167	214	240

COMPONENTS	INDEX	DIAMETER [mm]					
		100	125	150	160	200	250
Intake diffuser	DPO30/Ø	19	20	28	29	41	31
Exhaust diffuser	DPO31/Ø	19	20	28	29	41	31

COMPONENTS	INDEX	PRICE
Insulation sleeve 150 x 50	DPO50/Ø	149
Insulation sleeve 150 x 50 PREMIUM	DPO51/Ø	181
Hot air ventilator 125/ 400m3	DPO52/125	850
Hot air ventilator 160 / 540m3	DPO52/160	977
Hot air ventilator with by pass Ø125/ 400m/h	BANAN 1	1235
Hot air ventilator with by pass Ø150/ 600m/h	BANAN 2	1356
Hot air ventilator with by pass Ø150/ 800m/h	BANAN 3	1508
By pass throttling valve Ø100	DPO55/100	30
By pass throttling valve Ø125	DPO55/125	34
By pass throttling valve Ø150	DPO55/150	36
By pass throttling valve Ø200	DPO55/200	48
Fireplace wool weight 25mm (m ²)	DPO58	56



Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

COMPONENTS	INDEX	INTERNAL DIAMETER [mm]																
		100/ 160	120/ 180	125/ 180	130/ 200	140/ 200	150/ 220	160/ 220	180/ 250	200/ 300	220/ 300	230/ 300	250/ 350	300/ 400	350/ 450	400/ 500	450/ 550	500/ 550
Insulated pipe 1000 [mm]	DPO33/Ø	181	200	218	224	239	252	290	316	350	404	445	477	568	729	795	951	1047
Insulated pipe 500 [mm]	DPO34/Ø	132	145	160	179	179	179	200	218	256	286	314	316	356	422	489	554	611
Insulated pipe 250 [mm]	DPO71/Ø	91	98	109	112	120	128	145	160	178	202	223	239	286	364	399	477	524
87° T-connection	DPO41/Ø	268	295	323	336	363	372	393	412	462	506	531	556	582	627	658	736	811
45° T-connection	DPO49/Ø	401	443	486	506	543	560	591	619	697	758	797	834	876	940	988	1104	1215
90° elbow insulated	DPO35/Ø	174	191	209	214	246	260	266	285	336	381	418	433	495	571	635	717	789
45° elbow insulated	DPO36/Ø	141	156	171	177	209	223	234	246	292	330	364	381	433	495	582	646	710
60° elbow insulated	DOP56/Ø	141	156	171	177	209	223	234	246	292	330	364	381	433	495	582	646	710
30° elbow insulated	DOP57/Ø	141	156	171	177	209	223	234	246	292	330	364	381	433	495	582	646	710
15° elbow insulated	DOP58/Ø	141	156	171	177	209	223	234	246	292	330	364	381	433	495	582	646	710
Insulated cleaning hole with cap	DPO53/Ø	349	383	421	437	470	486	510	533	602	657	691	721	757	814	857	956	1054
Roof adapter (0°-45°)	DPO42/Ø	117	130	142	146	156	156	171	186	198	223	245	252	282	309	340	369	406
Roof adapter (10°-40°)	DPO89/Ø	117	130	142	146	156	156	171	186	198	223	245	252	282	309	340	369	406
Roof adapter (20°-50°)	DPO90/Ø	117	130	142	146	156	156	171	186	198	223	245	252	282	309	340	369	406
Roof adapter (30°-60°)	DPO91/Ø	117	130	142	146	156	156	171	186	198	223	245	252	282	309	340	369	406
Injection nozzle insulated	DPO43/Ø	75	84	93	99	105	105	114	126	134	138	150	165	186	246	255	303	332
Condensate collector	DPO44/Ø	96	107	115	118	125	125	136	145	157	169	186	187	203	222	250	289	318
Condensate collector with a plate	DPO54/Ø	141	150	160	159	169	169	176	187	197	208	225	223	238	256	282	318	349
Condensate collector with a base	DPO07/Ø	171	176	176	216	219	227	230	242	265	269	273	280	286	336	400	457	476
Insulated cap galvanized	DPO37/Ø	101	113	123	216	219	138	149	165	173	182	200	213	240	287	338	390	429
Bracket - adjustment 50-100 (2 pcs)	KDI15/Ø/100	176	194	194	220	220	287	287	287	372	372	372	372	451	451	505	505	505
Bracket - adjustment 100-200 (2 pcs)	KDI15/Ø/200	194	212	212	241	241	314	314	314	409	409	409	409	495	495	557	557	557
Bracket - adjustment 250-350 (2 pcs)	KDI15/Ø/350	234	254	254	290	290	377	377	377	492	492	492	492	595	595	668	668	668
Bracket - adjustment 400-500 (2 pcs)	KDI15/Ø/500	327	358	358	405	405	528	528	528	690	690	690	690	832	832	935	935	935
Reinforced clamping ring with a pin	KDI25/Ø	64	64	64	64	64	64	64	64	64	64	64	108	108	108	127	127	127
Adjustable clamping ring 50-100	KDI19/Ø/100	129	141	141	165	165	176	176	187	231	231	231	296	341	396	461	505	505
Adjustable clamping ring 100-200	KDI19/Ø/200	154	169	169	198	198	211	211	223	277	277	277	356	409	475	553	607	607
Adjustable clamping ring 250-350	KDI19/Ø/350	164	182	182	212	212	226	226	240	298	298	298	380	437	508	591	649	649
Adjustable clamping ring 400-500	KDI19/Ø/500	235	260	260	303	303	323	323	341	424	424	424	543	626	726	845	926	926
Clamping ring for the exhauster	KDI26/Ø	94	94	94	94	101	109	109	109	109	109	109	109	109	129	129	129	129
Drip cap/cover frame	KJ32/Ø	36	42	42	48	48	53	53	59	74	74	74	90	101	127	140	155	155
Insulated chimney extension 500 [mm]	DPO92/Ø	289	316	362	389	389	434	476	530	561	620	691	776	920	1065	1267	1496	1743
Insulated chimney extension 1000 [mm]	DPO93/Ø	391	429	490	520	547	634	691	720	762	881	1037	1239	1584	1734	1762	1971	2113



Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

AIR FLOW DUCTS

High-quality, flexible ducts manufactured in aluminum, paper, or polyester versions for air distribution. The flexible design minimizes the number of fittings needed for complex installations, which significantly reduces installation costs.

ZASTOSOWANIE

- In the automotive industry for air distribution in cars where Webasto systems are installed
- as a connection between exhaust manifolds and air filters
- in caravans or yachts for distributing warm air from internal fuel or gas-powered heating devices
- in production machines as ventilation
- in organ building to supply pipes with compressed air



COMPONENTS	INDEX	DIAMETER [MM] / LENGTH [M]									
		32/3	35/3	38/3	40/3	45/2,5	50/2,5	55/2,5	60/2	70/1mb	80/1mb
Aluminium	ALØ/dł. w kartonie	60	60	60	60	52	52	52	52	25	25
Paper	PAPØ/dł. w kartonie	42	42	42	42	42	42	42	42	22	22
Poliester	POLØ/dł. w kartonie	66	66	66	66	66	66	66	66	40	40

CLAMPS

NAZWA	DIAMETER [mm]	quantity per pack	TAPE WIDTH [mm]	INDEX	PRICE net in PLN
Galvanized clamp band	8-12	100	9	OZ/8-12	1,07
	10-16	50		OZ/10-16	1,10
	12-22	100		OZ/12-22	1,13
	16-27	50		OZ/16-27	1,15
	20-32	100		OZ/20-32	1,16
	25-40	100		OZ/25-40	1,28
	35-50	50		OZ/35-50	1,33
	40-60	25		OZ/40-60	1,57
	50-70	25		OZ/50-70	1,98
	60-80	25		OZ/60-80	2,16
	70-90	40		OZ/70-90	2,21
	80-100	25		OZ/80-100	2,29
	90-110	25		OZ/90-110	2,35
	100-120	25		OZ/100-120	2,38
	110-130	25		OZ/110-130	2,46
	120-140	25		OZ/120-140	2,48
	130-150	10		OZ/130-150	2,58
	140-160	25		OZ/140-150	2,75
	150-170	25		OZ/150-170	3,01
	160-180	25		OZ/160-180	3,22
Universal galvanized band	170-190	25		OZ/170-190	4,92
	200-220	25		OZ/200-220	4,97
	240-260	10		OZ/240-260	5,20
	300-320	10		OZ/300-320	6,49
	60-180	10		OZ/60-180	5,48



Elementy nietypowe podlegają wycenieniu po podaniu danych przez klienta. Ceny w PLN bez podatku VAT.

Insulation PE gray – TER MAX ST

INSULATED PIPE DIAMETER [inches]	INSULATED PIPE DIAMETER [Dn]	INNER INSULATION DIAMETER [mm]	INSULATION THICKNESS [mm]	INDEX	PACKAGING mb/box	PRICE net in PLN/mb
		12	6	TER12/6ST	600	2,46
			9	TER12/9ST	450	3,00
			13	TER12/13ST	250	9,37
			20	TER12/20ST	230	18,46
1/4	10	15	6	TER15/6ST	500	2,46
			9	TER15/9ST	350	3,60
			13	TER15/13ST	240	9,37
			20	TER15/20ST	140	18,46
3/8	12	18	6	TER18/6ST	420	2,95
			9	TER18/9ST	320	3,83
			13	TER18/13ST	220	10,13
			20	TER18/20ST	130	19,79
1/2	15	22	6	TER22/6ST	350	3,14
			9	TER22/9ST	260	4,20
			13	TER22/13ST	180	11,32
			20	TER22/20ST	110	22,13
3/4	20	28	6	TER28/6ST	250	3,90
			9	TER28/9ST	200	4,82
			13	TER28/13ST	150	13,21
			20	TER28/20ST	90	25,08
1	25	35	6	TER35/6ST	200	5,33
			9	TER35/9ST	150	5,65
			13	TER35/13ST	110	15,70
			20	TER35/20ST	70	30,34
1 1/4	32	42	9	TER42/9ST	100	6,83
			13	TER42/13ST	90	21,25
			20	TER44/20ST	60	33,86
1 1/2	40	48	9	TER48/9ST	90	8,35
			13	TER48/13ST	80	24,20
			20	TER48/20ST	50	40,25

Straight sections 2 mb, tolerance 2%. Packaged in boxes measuring 205x40x55 cm

Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

Insulation PE gray – TER MAX ST

INSULATED PIPE DIAMETER [inches]	INSULATED PIPE DIAMETER [Dn]	INNER INSULATION DIAMETER [mm]	INSULATION THICKNESS [mm]	INDEX	PACKAGING mb/box	PRICE net in PLN/mb
		54	9	TER54/9ST	70	15,43
			13	TER54/13ST	60	27,14
			20	TER54/20ST	40	42,29
2	50	60	9	TER60/9ST	60	16,20
			13	TER60/13ST	50	31,40
			20	TER60/20ST	40	46,56
		63	9	TER63/9ST	60	18,98
			13	TER63/13ST	50	31,40
			20	TER63/20ST	40	50,68
2 1/2	65	76	9	TER76/9ST	48	21,53
			13	TER76/13ST	40	36,14
			20	TER76/20ST	30	65,87
3	80	89	9	TER89/9ST	30	30,49
			13	TER89/13ST	26	42,29
			20	TER89/20ST	24	104,15
4		108	13	TER108/13ST	22	47,44
			20	TER108/20ST	16	111,71
			13	TER114/13ST	20	55,28
		114	20	TER114/20ST	14	116,92

Straight sections 2 mb, tolerance 2%. Packaged in boxes measuring 205x40x55 cm



Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

Insulation PE gray – TER MAX PW


INSULATED PIPE DIAMETER [inches]	INSULATED PIPE DIAMETER [Dn]	INNER INSULATION DIAMETER [mm]	INSULATION THICKNESS [mm]	INDEX	PACKAGING mb/box	PRICE net in PLN/mb
1/4	10	15	6	TER15/6PW	280	3,13
			9	TER15/9PW	180	5,06
			13	TER15/13PW	240	9,62
3/8	12	18	6	TER18/6PW	200	3,86
			9	TER18/9PW	150	5,48
			13	TER18/13PW	220	10,20
1/2	15	22	6	TER22/6PW	160	4,20
			9	TER22/9PW	140	6,16
			13	TER22/13PW	180	11,23
3/4	20	28	6	TER28/6PW	120	5,59
			9	TER28/9PW	90	6,64
1	25	35	6	TER35/6PW	90	6,12
			9	TER35/9PW	150	10,04

Straight sections 2 mb, tolerance 2%. Packaged in boxes measuring 205x40x55 cm

Insulation PE red – TER MAX PWL

INSULATED PIPE DIAMETER [inches]	INSULATED PIPE DIAMETER [Dn]	INNER INSULATION DIAMETER [mm]	INSULATION THICKNESS [mm]	INDEX	PACKAGING mb/box	PRICE net in PLN/mb
		12	4	TER12/4PWL	210	3,32
			6	TER12/6PWL	200	3,66
1/4	10	15	4	TER15/4PWL	200	3,53
			6	TER15/6PWL	150	3,92
3/8	12	18	4	TER18/4PWL	150	4,04
			6	TER18/6PWL	140	4,51
1/2	15	22	4	TER22/4PWL	130	4,26
			6	TER22/6PWL	110	4,73
3/4	20	28	4	TER28/4PWL	100	5,16
			6	TER28/6PWL	90	5,68
1	25	35	4	TER35/4PWL	90	6,47
			6	TER35/6PWL	80	6,97

Rolled sections, 10 m. Packaged in bags.

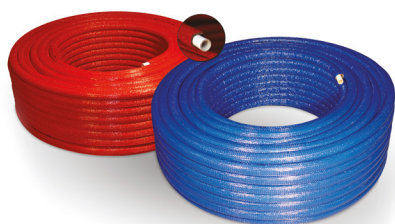

The company provides a service of coating Alupex ducts with knurled insulation in diameters from Ø 12 mm to Ø 35 mm in various colors and lengths with insulation thicknesses of 4, 6, or 9 mm. Ask your sales representative for the price.

Items marked in **red** are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

Insulation PE blue – TER MAX PWN

INSULATED PIPE DIAMETER [inches]	INSULATED PIPE DIAMETER [Dn]	INNER INSULATION DIAMETER [mm]	INSULATION THICKNESS [mm]	INDEX	PACKAGING mb/box	PRICE net in PLN/mb
1/4	10	15	6	TER15/6PWN	280	3,13
			9	TER15/9PWN	180	5,06
			13	TER15/13PWN	240	9,62
3/8	12	18	6	TER18/6PWN	200	3,86
			9	TER18/9PWN	150	5,48
			13	TER18/13PWN	220	10,20
1/2	15	22	6	TER22/6PWN	160	4,20
			9	TER22/9PWN	140	6,16
			13	TER22/13PWN	180	11,23
3/4	20	28	6	TER28/6PWN	120	5,59
			9	TER28/9PWN	90	6,64
1	25	35	6	TER35/6PWN	90	6,12
			9	TER35/9PWN	150	10,04

Straight sections 2 mb, tolerance 2%. Packaged in boxes measuring 205x40x55 cm

Insulation PE blue – TER MAX PWLN

INSULATED PIPE DIAMETER [inches]	INSULATED PIPE DIAMETER [Dn]	INNER INSULATION DIAMETER [mm]	INSULATION THICKNESS [mm]	INDEX	PACKAGING mb/box	PRICE net in PLN/mb
		12	4	TER12/4PWLN	210	3,32
			6	TER12/6PWLN	200	3,66
1/4	10	15	4	TER15/4PWLN	200	3,53
			6	TER15/6PWLN	150	3,92
3/8	12	18	4	TER18/4PWLN	150	4,04
			6	TER18/6PWLN	140	4,51
1/2	15	22	4	TER22/4PWLN	130	4,26
			6	TER22/6PWLN	110	4,73
3/4	20	28	4	TER28/4PWLN	100	5,16
			6	TER28/6PWLN	90	5,68
1	25	35	4	TER35/4PWLN	90	6,47
			6	TER35/6PWLN	80	6,97

Rolled sections, 10 m. Packaged in bags.

Crimped protective pipe (corrugated pipe)

NAME	INTERNAL DIAMETER [mm]	INDEX	LENGTH [m]	PRICE net in PLN/mb
Crimped protective pipe	18	PESZEL / Ø	50	0,70
	21		50	0,81
	23		50	0,91
	28		50	1,69
	36		50	3,06

Available in red and blue

Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

Accessories for installing insulation

ACCESSORIES	INDEX	PACKAGING	PRICE net in PLN/mb
Duct Tape 50*10 red	AKC02	Rolka 10 mb/50 mm	6,77
Duct Tape 50*10 blue	AKC04	Rolka 10 mb/50 mm	6,77
Duct Tape 50*10 gray	AKC01	Rolka 10 mb/50 mm	6,77
Duct Tape 50*25 red	AKC05	Rolka 25 mb/50 mm	13,35
Duct Tape 50*25 blue	AKC06	Rolka 25 mb/50 mm	13,35
Duct Tape 50*25 gray	AKC07	Rolka 25 mb/50 mm	13,35
Duct Tape 50*50 red	AKC08	Rolka 50 mb/50 mm	26,09
Duct Tape 50*50 blue	AKC09	Rolka 50 mb/50 mm	26,09
Duct Tape 50*50 gray	AKC10	Rolka 50 mb/50 mm	26,09
Clamps for insulation	AKC03	Torebka 100 szt.	6,44




Expansion cords and tapes

NAME	DIAMETER [mm]	PAKOWANIE		INDEX [spool]	INDEX [box]	PRICE net in PLN/mb
		WOUND ON A SPOOL [mb/spool]	QUANTITY [mb/box]			
expansion cord	6	1000	—	SZNUR/6		0,66
	8	550	—	SZNUR/8		0,74
	10	350	—	SZNUR/10		0,79
	13	200	—	SZNUR/13		0,95
	15	1000	—	SZNUR/15		1,02
	20	600	—	SZNUR/20		1,47
	25	400	—	SZNUR/25		1,98
	30	250	—	SZNUR/30		2,31
	35	180	180	SZNUR/35	SZNURK/35	3,05
	40	100	—	SZNUR/40		4,65
	45	50	—	SZNUR/45		4,92
	50	50	160	SZNUR/50	SZNURK/50	7,54
	60	50	120	SZNUR/60	SZNURK/60	10,44

Items marked in **red** are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.


LAUNDRY CHUTES

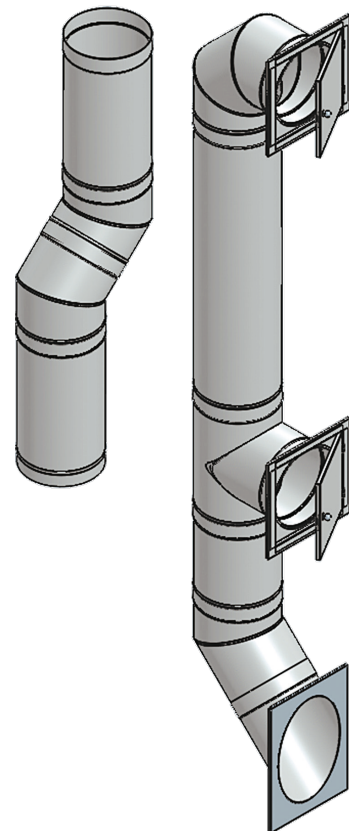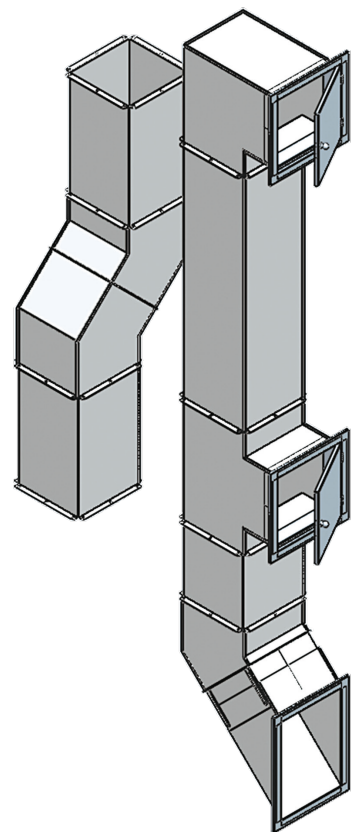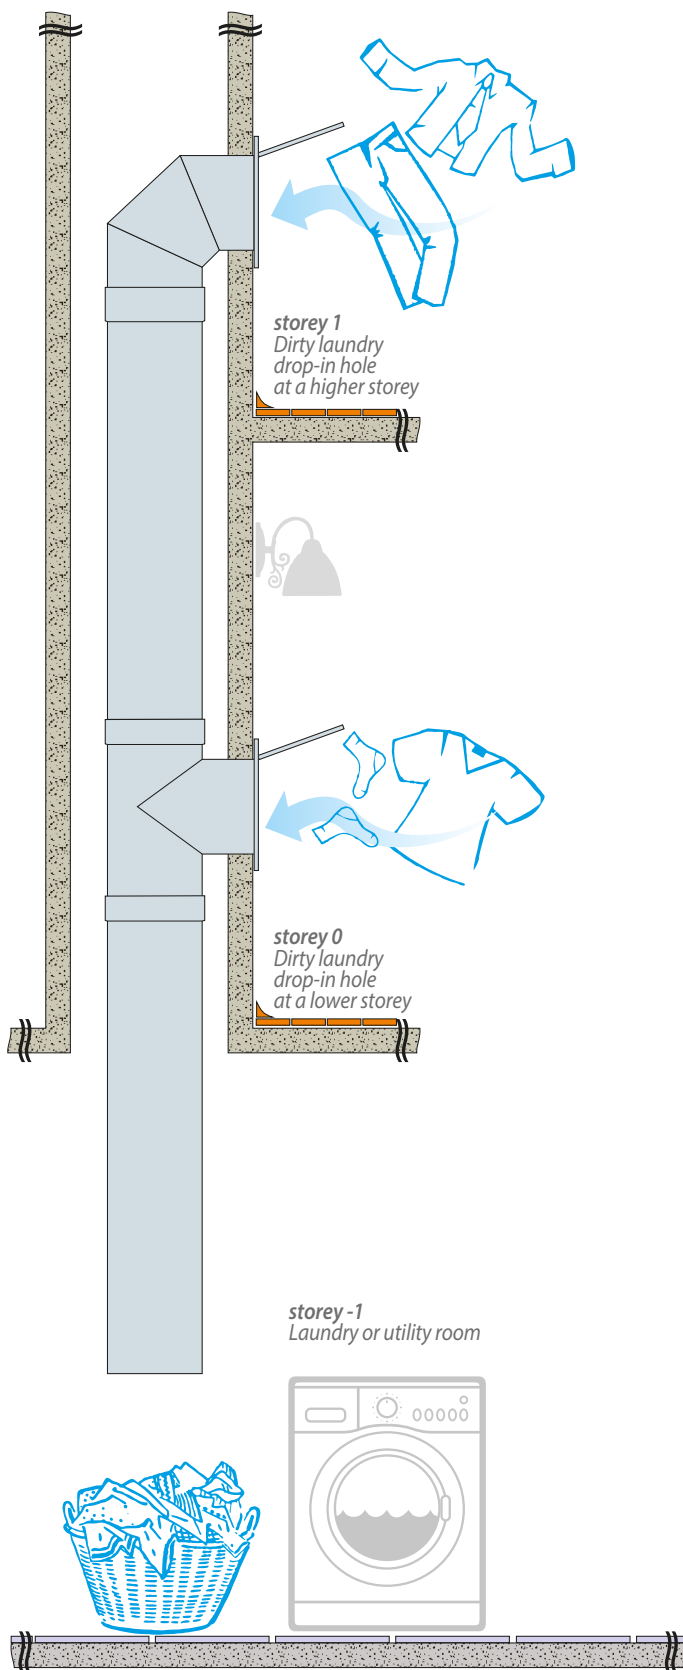

All elements of the chute are made of acid-resistant steel. This material is resistant to moisture, which eliminates the risk of rust. Acid-resistant steel does not cause clothing to become electrically charged. This means that it slides down the chute without any interference.

Our chutes feature:

- New technology for connecting elements – ensures smooth discharge
- Highest quality material
- Long service life confirmed by a 25-year warranty
- High value for money
- Tailored to individual customer needs – possibility of manufacturing chutes to size according to the customer's design

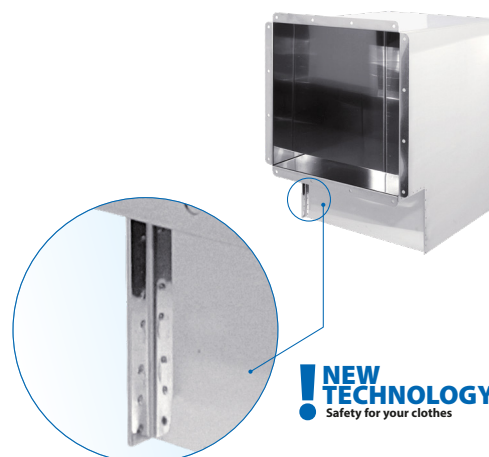

Square chutes

COMPONENTS	INDEX	DIAMETER [mm]			
		250x250	300x300	350x350	400x400
Chute section 1 m	ZSP-PR-KAN/XXX/1MB	934	1126	1254	1440
Chute section 0,5 m	ZSP-PR-KAN/XXX/0,5MB	550	646	710	806
Chute section 0,3 m	ZSP-PR-KAN/XXX/0,3MB	422	486	531	589
Chute elbow 45°	ZSP-PR-KOL/XXX/45	459	539	625	716
Chute elbow 90°	ZSP-PR-KOL/XXX/90	642	735	809	1010
Chute T-piece 90°	ZSP-PR-TR/XXX/90	648	766	893	1089
Chute end 45°	ZSP-PR-ZAK/XXX/45	404	477	546	625
Chute end telescope with a frame	ZSP-PR-TEL/XXX/140-240/45	710	778	887	1102
Horizontal door with a drawer	ZSP-PR-DRZ/XXX	306	383	421	459
Mounting bracket for square chute right/left	ZSP-PR-WSP/XXX	220			

Round chutes

COMPONENTS	INDEX	DIAMETER [mm]			
		Ø250	Ø300	Ø350	Ø400
Chute section 1 m	ZSP-OK-KAN/XXX/1MB	329	389	465	528
Chute section 0,5 m	ZSP-OK-KAN/XXX/0,5MB	207	224	256	288
Chute section 0,33 m	ZSP-OK-KAN/XXX/0,33MB	131	138	189	210
Chute elbow 45°	ZSP-OK-KOL/XXX/45	373	429	495	563
Chute elbow 90°	ZSP-OK-KOL/XXX/90	477	569	673	783
Chute elbow 90°	ZSP-OK-TR/XXX/90	876	1035	1207	1348
Chute end 45°	ZSP-OK-ZAK/XXX/45	416	472	557	637
Chute end socket with a frame	ZSP-OK-KRK/XXX/45	618	716	826	944
Chute door	ZSP-OK-DRZ/XXX	230	306	383	459
Chute mounting bracke	ZSP-OK-OB/XXX	95	116	196	238
Transition support	ZSP-OK-PP/XXX	509	547	662	768
Chute upper end (kw)	ZSP-OK-ZAK/GÓR/XXX/KW	237	244	257	272
Chute upper end (ok)	ZSP-OK-ZAK/GÓR/XXX/OK	231	238	252	266

Items marked in red are available in stock.

Non-standard items are priced after the customer provides the necessary data. Prices are in PLN without VAT.

COMMERCIAL OFFER NO:.....

Date :

For:

.....

PRODUKTY PODLEGAJĄCE RABATOWI	DISCOUNT	PAGE	COMMENTS
SINGLE-WALL TURBO CHIMNEY SYSTEMS		5	
DOUBLE-WALL TURBO CHIMNEY SYSTEMS		6	
DOUBLE-WALL TURBO CHIMNEY SYSTEMS WHITE		6	
FLEXIBLE FLUE PIPES – STALFLEX		7	
SINGLE-WALL TURBO CHIMNEY SYSTEMS - INSULATED		9	
DOUBLE-WALL TURBO CHIMNEY SYSTEMS - INSULATED		9	
ACID-RESISTANT CHIMNEY LINERS		11	
OVAL CHIMNEY LINERS		12	
DOUBLE-WALLED INSULATED CHIMNEYS		14	
ACID-RESISTANT SINGLE-WALL MATT		16	
HEAT-RESISTANT SINGLE-WALL CHIMNEY LINERS		17	
HEAT-RESISTANT OVAL CHIMNEY LINERS		19	
HEAT-RESISTANT DOUBLE-WALLED INSULATED CHIMNEYS		21	
INVEST HEAT-RESISTANT DOUBLE-WALLED CHIMNEYS		22	
BLACK ROUND CHIMNEY CONNECTIONS		24	
CHIMNEY CONNECTIONS FOR PELLET-FIRED APPLIANCES		25	
ACCESSORIES FOR CERAMIC CHIMNEYS		26	
CHIMNEY COWLS		29	
CHIMNEY DOORS		31	
EXPANSION TANKS		31	
FLEX FLEXIBLE ALUMINIUM PIPES		32	
ROUND AIR DISTRIBUTION SYSTEM OF THE GALVANISED STEEL SHEET		33	
RECTANGULAR AIR DISTRIBUTION SYSTEM OF THE GALVANISED STEEL SHEET		35	
HOT AIR DISTRIBUTION SYSTEM		36	
VENTILATION CHIMNEYS INSULATED		37	
DUCTS FOR AIR FLOW		38	
CLAMPS		39	
THERMAL INSULATION SYSTEMS		40	
CRIMPED PROTECTIVE PIPES (CORRUGATED PIPES)		43	
ACCESSORIES FOR INSULATION		44	
EXPANSION CORDS AND TAPES		44	
LAUNDRY CHUTES		45	

Payment deadline:.....


Order fulfillment deadline:.....

Additional findings

.....

Customer service representative

If, after the customer has placed an order, circumstances arise that justify an increase in the price of the ordered goods, such as an increase in the price of raw materials or an increase in the foreign exchange rate, the Seller has the right to increase the price of the goods accordingly, indicating the reason for the increase.

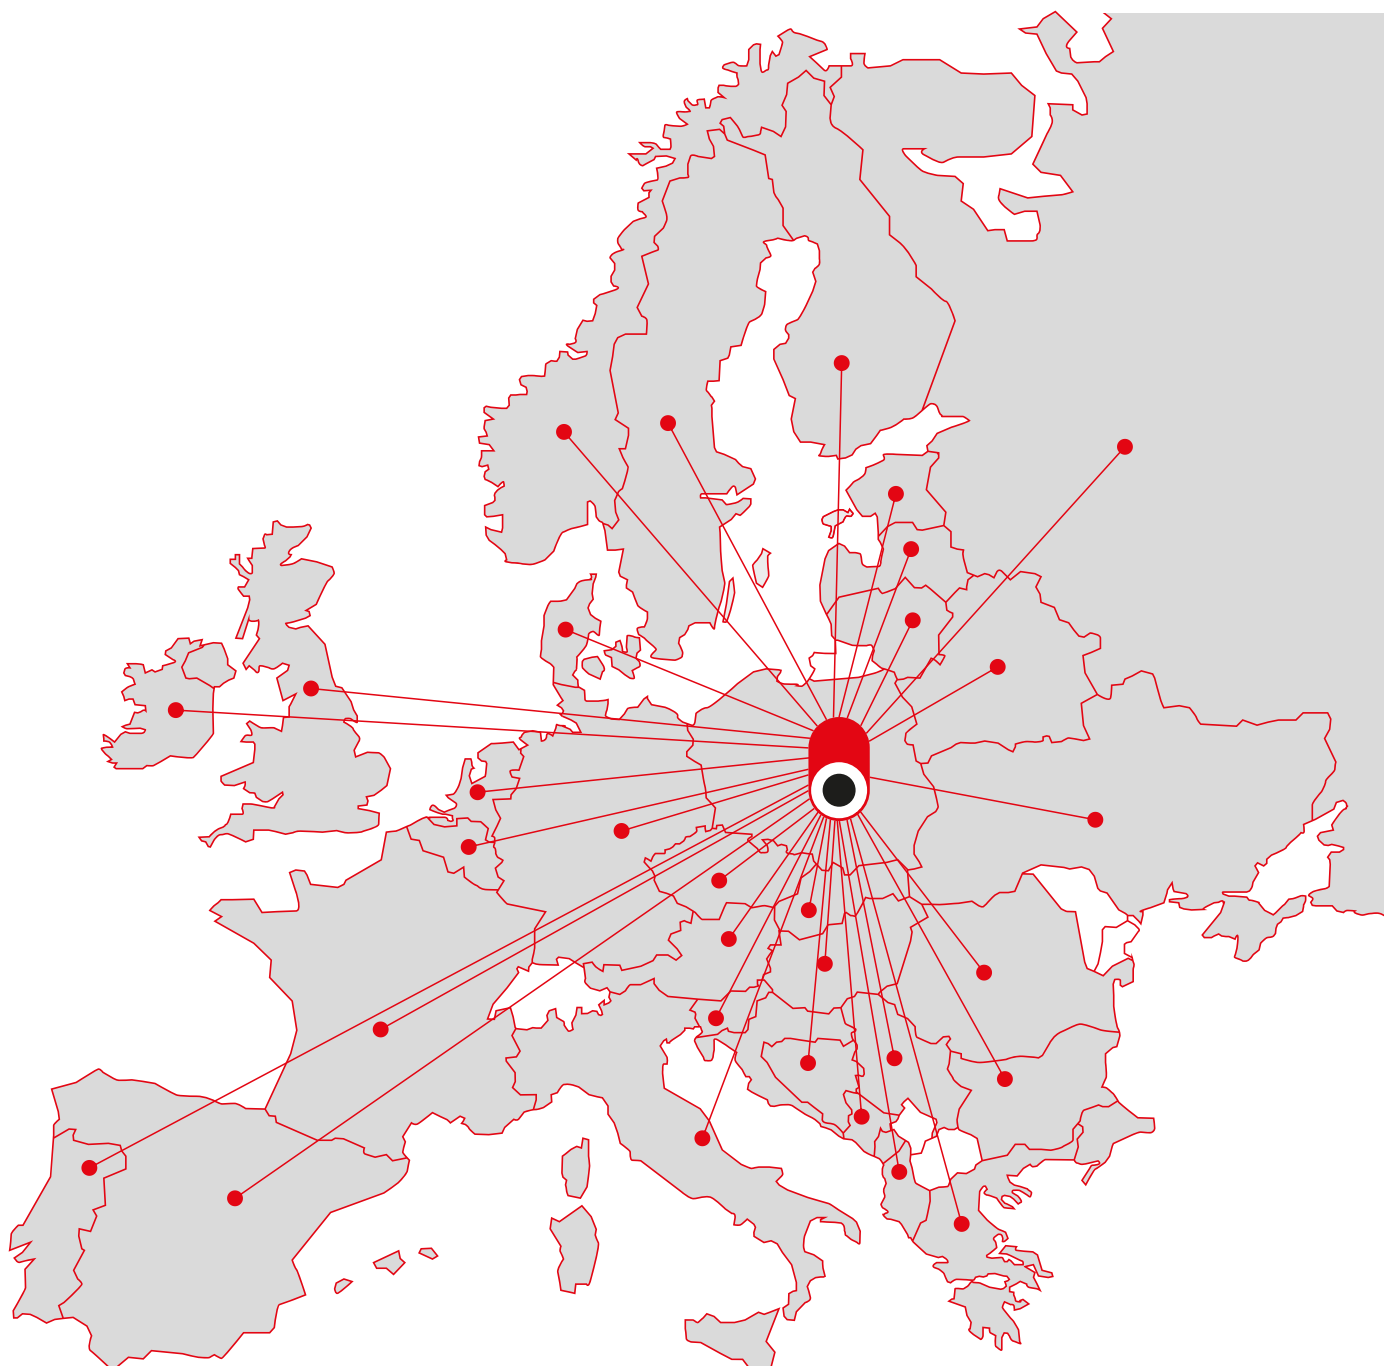**Krzysztof Szymański - Export Director**

mob. +48 502 308 944

email: krzysztof.szymanski@prodmax.pl

Piotr Niepokólczycki - Export Specialist

mob. +48 516 452 904

email: piotr.niepokolczycki@prodmax.pl

Dawid Kowalczyk - Export Specialist

mob. +48 789 105 993


email: dawid.kowalczyk@prodmax.pl

This image shows a full page of white paper with horizontal grey ruling lines. At the top center, the word "NOTES" is printed in a bold, black, sans-serif font. The rest of the page is filled with evenly spaced horizontal lines, providing space for writing.

PRICE LIST - IV EDITION 2026

© PRODMAX SP. Z O.O. 05-806 Sokołów, ul. Sokołowska 38, Polska

*We will take care of
the atmosphere
of your home!*



prodmax.pl



PRODMAX Sp. z o.o.

ul. Sokołowska 38
05-806 Sokołów
NIP: 5342658107
REGON: 523805523

CUSTOMER SERVICE OFFICE

tel.: +48 604 441 233
tel.: +48 696 039 007
email: sprzedaz@prodmax.pl